


PRODUCT INFORMATION SHEET

Model No	SMRCP-1056T	
Product type	Android Tablet	
Product Description	10.1" Digital Signage	



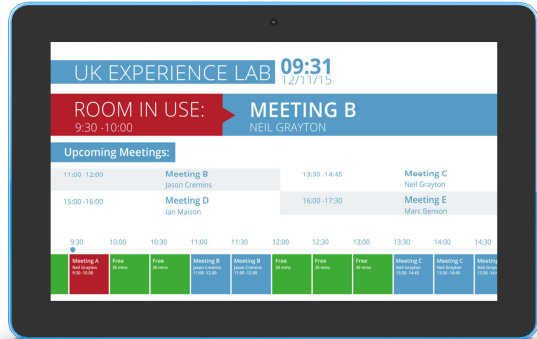

System	CPU	RK3566 Quad core cortex A55
	RAM	2GB
	Internal memory	16GB
	Operation system	Android 11
	Touch screen	10-Point capacitive touch
Display	Panel	10.1"LCD panel
	Panel Type	IPS
	Resolution	1280*800
	Display Colors	16.7M Colors
	Viewing angle	R/L 85/85, U/D 85/85
	Display mode	Normally black
	Contrast ratio	1500:1
	Response Time	25ms
	Back-light Type	ELed
	Luminance	280cd/m2
Network	Aspect Ratio	,16:10
	WiFi	IEEE 802.11a/b/g/n/ac
	Buletooth	Bluetooth 5.4
Interface	Ethernet	10M/100M/1000M ethernet
	SIM Slot	4G Flow Card
	SD Slot	SD card ,Max support to 64GB
	Earphone	3.5mm earphone + Microphone
	USB	USB 3.0 host
	USB	USB for serial (RS232 Level) , Optional USB Host
	RJ45	Ethernet interface
	Micro USB	Micro USB OTG
	Power jack	DC power input
Media play	Video format	MPEG-1,MPEG-2,MPEG-4,H.265,H.264,H.263,VC-1,VP8,VP9,MVC, etc. 支持最大到4K视频
	Audio format	MP3/WMA/AAC/WAV/OGG, etc
	Photo	JPEG/PNG/GIF,etc
Other	Product Colors	White/Black
	VESA	75*75 mm
	Button	Power
	G-sensor	Support 90 degrees
	Speaker	2*2W
	Microphone	Single microphone
	NFC	Optional , 13.56MHz, ISO/IEC 18092, ISO/IEC 21481, ISO/IEC 14443 A&B, ISO/IEC 15693, Japanese Industrial Standard (JIS) (X) 6319-4, MIFARE Classic encrypted tags and cards
	RFID	Optional ,125k,ISO/IEC 11784/11785,支持EM4100, TK4100/GK4100
	LED light bar	LED light bar with RGB and mixed color
	Camera	Routine angle 5.0MP
	4G Moduel	Optional
	Language	Multi-language

Working Surrounding	Certificates	CCC/CE/FCC
	POE	Otional (Support IEEE802.3at,up to 30W)
	Working Temperature	0℃—40℃
	Storage Temperature	-20℃—60℃
	Working Humidity	20~80%RH
Accessories	Storage Humidity	10~95%RH
	Adapter	Adapter, 12V/1.5A
	User manual	*1

Product Measurement, mm

Unit (Without packaging)			Giftbox (With Packaging)			Carton 10pcs/CTN		
L	W	H	L	W	H	L	W	H
N.W(kg)			N.W(kg)			N.W(kg)		
						G.W		

Drawing

