



YOUR SMART HOME CHOICE

PRODUCT BROCHURE

产品手册

深圳松诺技术有限公司

Shenzhen Sonoff Technologies Co.,Ltd

地址 Address

深圳市龙岗区坂田街道大发埔社区布龙路 663 号 A 栋三层、六层

3F & 6F, Bldg A, No. 663, Bulong Rd, Dafapu Community, Bantian St, Longgang Dist, Shenzhen, GD, China

官网 Web

<https://sonoff.tech>

电话 Tel

+86-755-27955416



About SONOFF

Shenzhen Sonoff Technologies Co.,Ltd located in Shenzhen, China, is a top-ranking smart home automation manufacturer specializing in R&D, design, production and marketing.

SONOFF is an independent brand integrating software and hardware, the products are known for quality and innovation. The main technologies SONOFF products based on are Wi-Fi, ZigBee and other mainstream communication protocols, and different communication protocols can be configured according to customer needs and using scenarios.

Our Vision: Making life easier

Our Commission: SONOFF is fully committed to fulfilling home automation for a simple and smart life.


深圳松诺科技有限公司,坐落于中国创新之都——深圳,是一家领先的智能家居自动化产品制造商。我们专注于智能家居领域的创新与卓越,业务涵盖产品的研发、设计、生产以及市场营销等多个环节。

作为一家拥有独立品牌的企业,SONOFF 以其卓越的产品品质和前沿的技术创新而广受赞誉。我们的产品线全面覆盖了基于 Wi-Fi、ZigBee 等主流通信协议的智能家居解决方案,并能够根据客户的个性化需求以及多样化的使用场景,灵活配置通信协议,以满足不同市场的需求。

我们的愿景: 让生活更便捷

我们的使命: SONOFF 致力于实现智能家居自动化,打造简单智能的生活。

|| Company Timeline

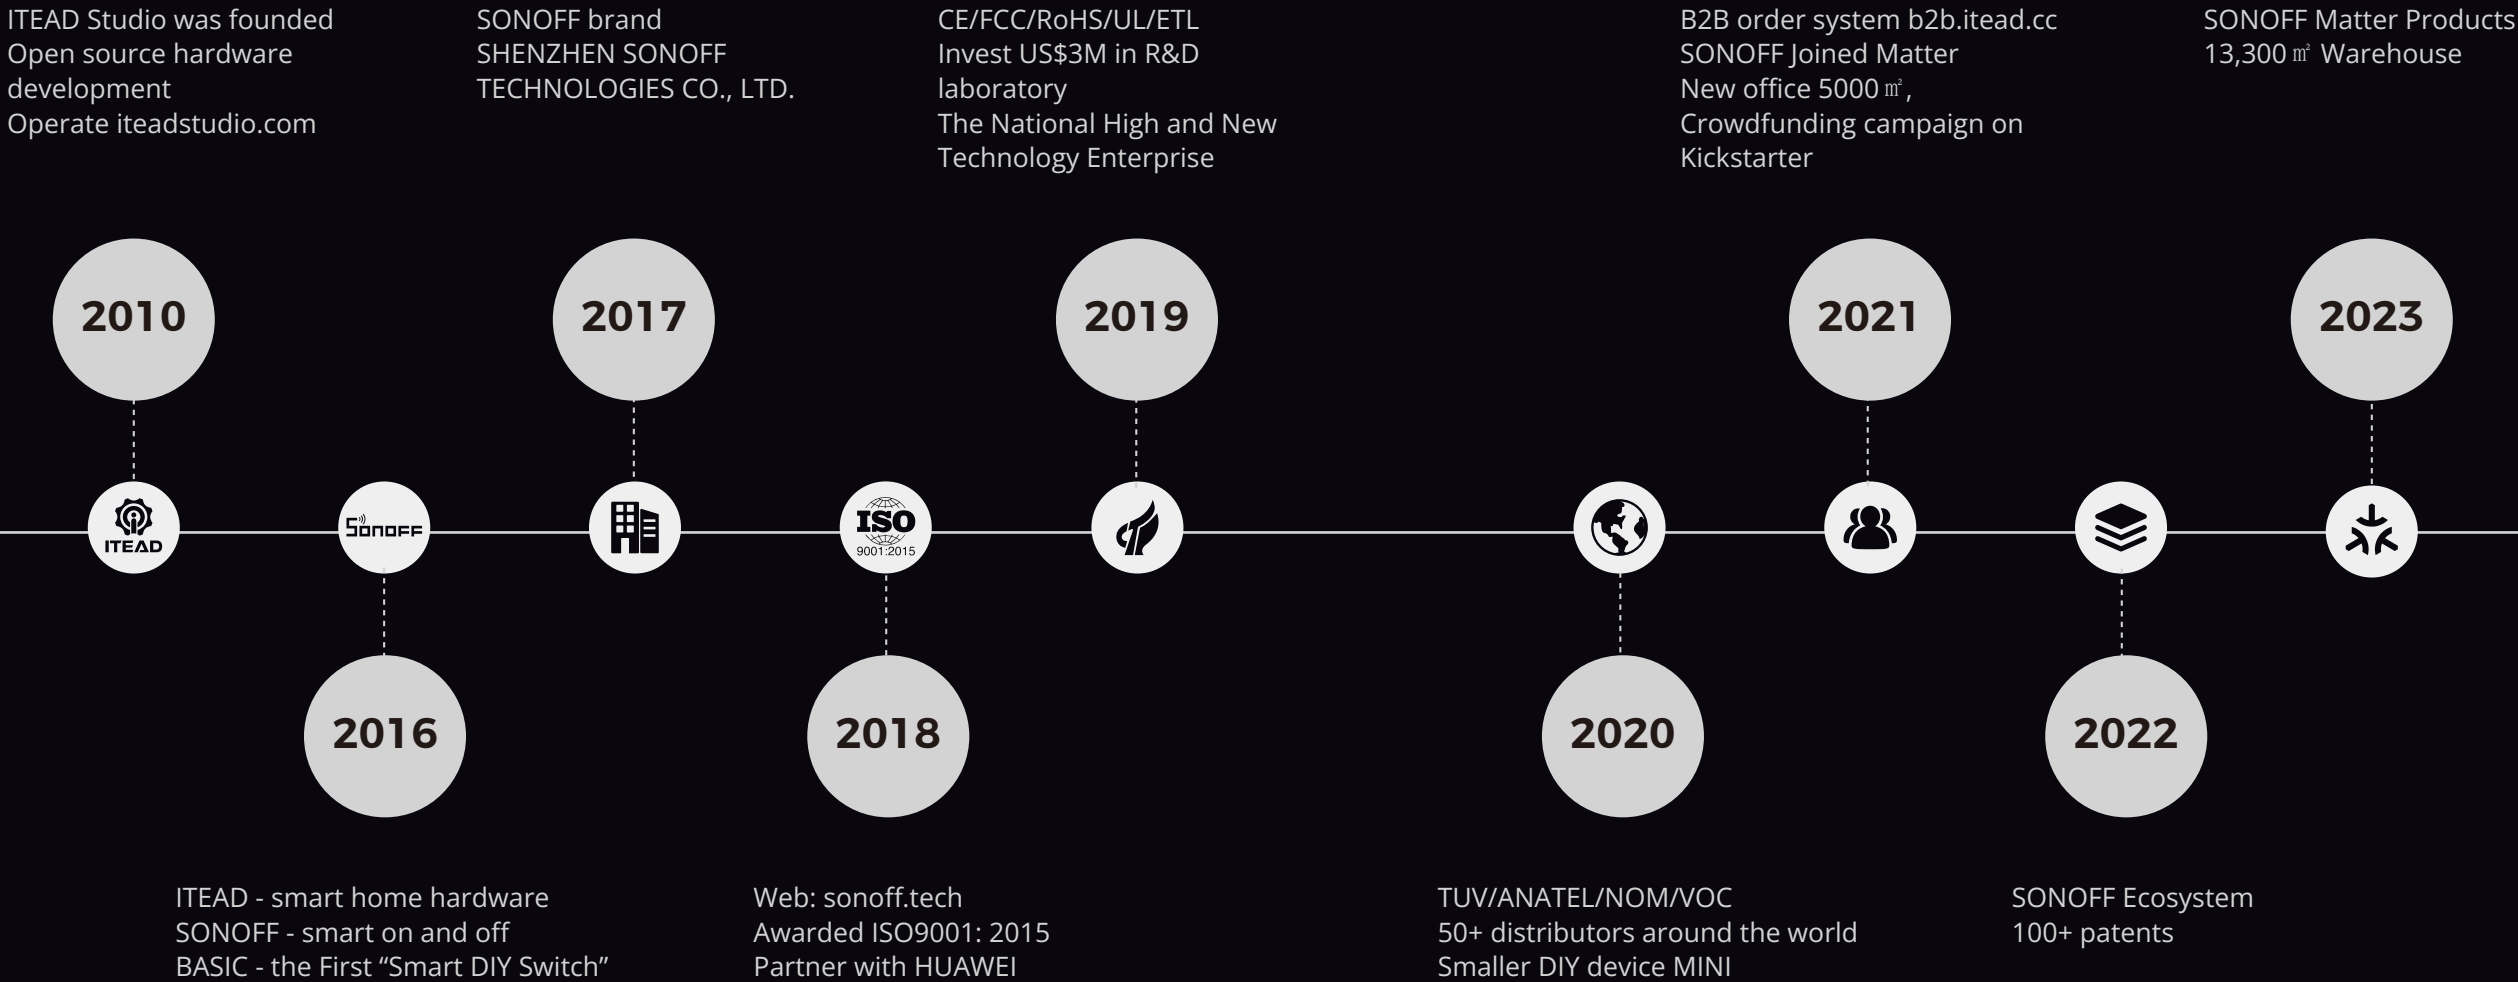

SONOFF Ecosystem SONOFF生态系统	5000m² Headquarters 5000m ² 办公区域	13300m² Warehouse 13300m ² 仓库	50+ Global Distribution Network 全球分销网络
BASIC The First "Smart DIY Switch" BASIC - 首发智能DIY开关	30+ Customer Service Personnel 30+ 客服团队	90+ Marketing Employees 90+ 营销团队	100+ R&D Engineers 100+ 研发团队
15M Global Users 1500万全球用户	150+ Countries and Areas 150+ 国家及地区	300+ SKU / Smart Devices 300+ SKU / 产品	20M Annual Capacity 2000万+ 年产量

AUTHORITATIVE CERTIFICATE




100+
Patents



ISO9001:2015



Certificate of High and New Technology

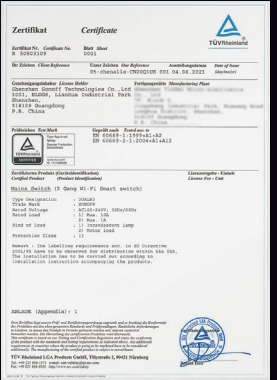


TÜV Certified Compliance

SONOFF smart devices support to work with the following AIoT ecosystems

SONOFF智能家居设备支持以下AIoT生态系统协同工作


works with alexa

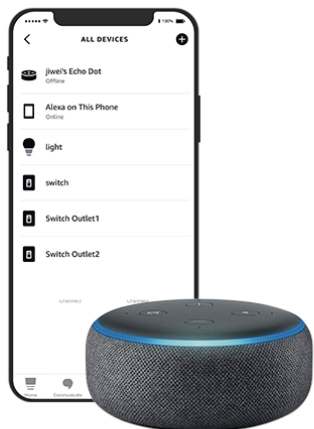

works with Google Home



works with Alice

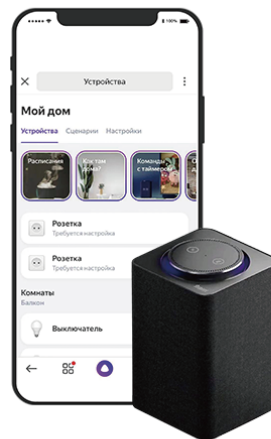

works with HUAWEI HiLink



works with mijia




works with DuerOS




works with SmartThings



Hey Siri

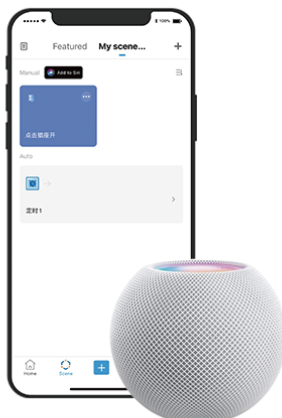

works with IFTTT

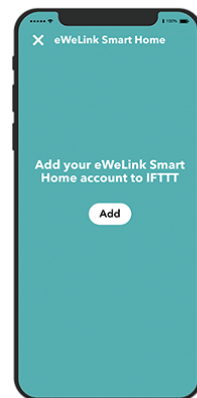

works with AliGenie



works with Midea Meiju



SONOFF Smart Device Work with eWeLink APP

SONOFF智能设备通过易微联APP使用

- 

Remote Control
远程控制
- 

Share Control
分享控制
- 

Timer Schedule
定时器
- 

Power on State
上电状态设置
- 

History Operation Record
历史操作记录
- 

Sync Status
同步状态
- 

LAN Control
局域网控制
- 

Voice Control
语音控制
- 

Multi-language Operation
多语言设置
- 


Smart Scene
智能场景
- 

Inching Mode
点动功能
- 

Camera Feature
添加摄像头
- 

Interlocking
互锁模式
- 

Group Control
群组控制

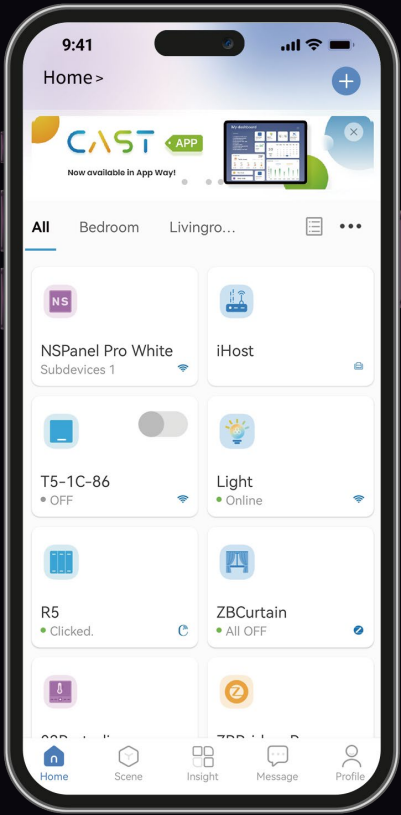

eWeLink

Download on the
App Store

GET IT ON
Google Play




CATALOGS

目 录

	DIY SMART SWITCHES DIY开关系列	01 - 22
	SMART PLUGS 插座系列	23 - 30
	SMART WALL SWITCHES 墙壁开关系列	31 - 40
	CENTRAL CONTROL PANEL 中控屏系列	41 - 44
	GATEWAY & SENSORS 网关与传感器系列	45 - 56
	SMART LIGHTING 照明系列	59 - 68
	SECURITY CAMERAS 摄像头系列	69 - 72
	HOME APPLIANCES 生活电器系列	73 - 76
	ACCESSORIES 配件系列	77 - 90

DIY SMART SWITCHES

DIY开关系列

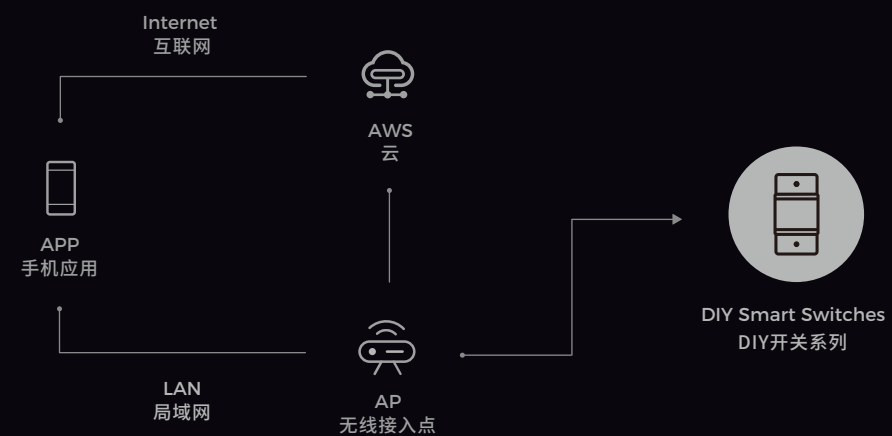

BASICR2



5

HARDWARE UPDATE
硬件更新迭代

26

SOFTWARE UPDATE
软件更新迭代

7 Million

CUMULATIVE SALES HAVE EXCEEDED
累计销售已超七百万



BASICR2

Wi-Fi Smart Switch
Wi-Fi智能开关模块



Remote Control
远程控制



Voice Control
语音控制



Timer Schedule
智能定时/延时

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	10A
Gang 通道:	1-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	88x39x24mm
Net weight 净重:	50g
Certification 产品认证:	ETL/CE/FCC/RoHS

DIY SMART SWITCHES

DIY开关系列



RFR2

Wi-Fi Smart Switch with RF Control

Wi-Fi智能开关模块(RF遥控)



Remote Control
远程控制



Voice Control
语音控制



RF Control
RF 控制

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	10A
Gang 通道:	1-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & 433MHz
Casing material 外壳材质:	PC V0
Size 尺寸:	88x39x24mm
Net weight 净重:	52g
Certification 产品认证:	ETL/CE/FCC/RoHS



BASICR4

Wi-Fi Smart Switch

Wi-Fi智能开关模块



Remote Control
远程控制



Voice Control
语音控制



Timer Schedule
智能定时/延时

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	10A
Gang 通道:	1-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	88x39x24mm
Net weight 净重:	45.8g
Certification 产品认证:	ISED/FCC/RoHS/ETL/CE/STRC

DIY SMART SWITCHES

DIY开关系列



ZBMINIL2

ZBMINI Extreme

Zigbee Smart Switch (No Neutral Required)
ZigBee智能开关模块(迷你)

- 
Remote Control
远程控制
- 
Voice Control
语音控制
- 
No Neutral Wire Required
无需零线

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	6A
Wireless standard 无线标准:	Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	PC V0
Size 尺寸:	39.5x32x18.4mm
Net weight 净重:	22g
Certification 产品认证:	CE/FCC/TUV/RoHS/ISED



ZBMINIR2

ZBMINI Extreme

Zigbee Smart Switch (Neutral Wire Required)
ZigBee 智能开关模块(迷你)

- 
Remote Control
远程控制
- 
Voice Control
语音控制
- 
Timer Schedule
智能定时/延时

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	10A
Wireless standard 无线标准:	Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	PC V0
Size 尺寸:	39.5x33x16.8mm
Net weight 净重:	26.7g
Certification 产品认证:	CE/FCC/ISED/RoHS

DIY SMART SWITCHES

DIY开关系列



MINIR4M



MINIR4



MINI Extreme

Wi-Fi Smart Switch

Wi-Fi智能开关模块



Remote Control
远程控制



Voice Control
语音控制



Timer Schedule
智能定时/延时

Rating 额定参数:	100-240V ~, 50/60Hz
Max.Load 最大负载:	10A
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	39.5x33x16.8mm
Net weight 净重:	26.7g
Certification 产品认证:	CE/FCC/RoHS/TUV/ISED/SRRC/Matter

MINI Extreme

Wi-Fi Smart Switch

WiFi智能开关



Remote Control
远程控制



Voice Control
语音控制



Single/Countdown Timing
智能定时/延时

Rating 额定参数:	100-240V ~, 50/60Hz
Max.Load 最大负载:	10A
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	39.5x33x16.8mm
Net weight 净重:	26.7g
Certification 产品认证:	CE/FCC/RoHS/SRRC/TUV/ISED

S-MATE Extreme

eWeLink-Remote Switch Mate

S-MATE开关伴侣



eWeLink-Remote
易微联轻智能

Input 输入:	3V ===
Battery model 电池型号:	CR2477(3V)
Wireless standard 无线标准:	2.4G
Casing material 外壳材质:	ABS
Size 尺寸:	40.3x37.4x18.3mm
Net weight 净重:	26.8g
Certification 产品认证:	CE/FCC/ISED/RoHS



S-MATE2

DIY SMART SWITCHES

DIY开关系列



MINIR2

Wi-Fi Smart Switch with DIY Mode
Wi-Fi智能开关模块(迷你)



Remote Control
远程控制



Voice Control
语音控制



DIY Mode
DIY 模式

Rating 额定参数:

100-240V~, 50/60Hz

Max.Load 最大负载:

10A

Gang 通道:

1-Gang

Wireless standard 无线标准:

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质:

PC V0

Size 尺寸:

42.6x42.6x20mm

Net weight 净重:

35g

Certification 产品认证:

CE/FCC/RoHS



DUALR3

2-gang Wi-Fi Smart Switch
Wi-Fi智能开关模块(双通道)



Motor Mode
电机模式



Voice Control
语音控制



Power Monitoring
电量监测

Rating 额定参数:

100-240V~, 50/60Hz

Max.Load 最大负载:

2400W/240V~10A/Gang
3600W/240V~15A/Total

Motor Load 电机负载:

10-240W/1A

Gang 通道:

2-Gang

Wireless standard 无线标准:

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质:

PC V0

Size 尺寸:

54x49x24mm

Net weight 净重:

58g

Certification 产品认证:

TUV/CE/FCC/RoHS



DUALR3 Lite

2-gang Wi-Fi Smart Switch
Wi-Fi智能开关模块(双通道)



Motor Mode
电机模式



Voice Control
语音控制

Rating 额定参数:

100-240V~, 50/60Hz

Max.Load 最大负载:

2400W/240V~10A/Gang
3600W/240V~15A/Total

Motor Load 电机负载:

10-240W/1A

Gang 通道:

2-Gang

Wireless standard 无线标准:

Wi-Fi IEEE 802.11 b/g/n 2.4GHz

Casing material 外壳材质:

PC V0

Size 尺寸:


54x49x24mm

Net weight 净重:

58g

Certification 产品认证:

TUV/CE/FCC/RoHS



DIY SMART SWITCHES

DIY开关系列



MINI-D

Wi-Fi Smart Switch

Wi-Fi智能开关模块



Remote Control
远程控制



Dry Contact Output
干接点输出



Support AC/DC Input
支持AC/DC输入

Rating 额定参数: 100-240V ~ 50/60Hz 0.1A Max OR 12-48V $\approx$ 1A Max μ
Load 负载类型: 24V $\approx$ 2A Max Resistive load OR 12/24V $\approx$ 8W 
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质: PC
Size 尺寸: 41x43x21.5mm
Net weight 净重: 34.5g
Certification 产品认证: CE/FCC/RoHS



Micro

USB Smart Adapter

USB智能适配器



Remote Control
远程控制



Voice Control
语音控制

Input 输入: 5V $\approx$
Output 输出: 5V $\approx$ 2A
Max.Load 最大负载: 12W
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Interface type 接口类型: Micro-USB
Casing material 外壳材质: PC V0
Size 尺寸: 31X26.5X33mm
Net weight 净重: 17g
Certification 产品认证: CE/FCC/RoHS

ZBMicro

Zigbee USB Smart Adaptor

ZigBee USB 智能适配器



Remote Control
远程控制



Voice Control
语音控制

Rating 额定参数: 5-22V $\approx$ 4.6A MAX
Rated Power 额定功率: 36W MAX (Use QC 3.0 Adaptor)
Wireless standard 无线标准: Zigbee 3.0
Interface type 接口类型: USB Type-A
Data transfer 数据传输: USB 2.0
Casing material 外壳材质: PC
Size 尺寸: 33x31x26.5mm
Net weight 净重: 17.6g
Certification 产品认证: CE/FCC/ISED/RoHS

DIY SMART SWITCHES

DIY开关系列



TH Origin/TH Elite

Smart Temperature and Humidity Monitoring Switch

Wi-Fi智能开关模块(温湿度监测)



Voice Control
语音控制



Single/Countdown Timing
智能定时/延时



Temperature/Humidity Monitoring
温度和湿度监测

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	THR316,THR316D:16A THR320,THR320D:20A
Dry Contact Output 干接点输出:	5-30V,1A Max
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	THR316,THR320:98x54x27.5mm THR316D,THR320D:98x54x31mm
Net weight 净重:	THR316,THR320:100g THR316D,THR320D:120g
Compatible Sensors 兼容传感器设备:	THS01,MS01,WTS01,RL560
Certification 产品认证:	TUV/CE/WWA/FCC/RoHS/SRRC

* You can connect SONOFF RL560 seneor extension cable to the sensor to monitor the humidity level in an ideal position.

* 使用传感器时,可通过接入传感器延长线(RL560),将传感器放在所需要的位置。




THR316/THR320



THR316D/THR320D

DIY SMART SWITCHES

DIY开关系列

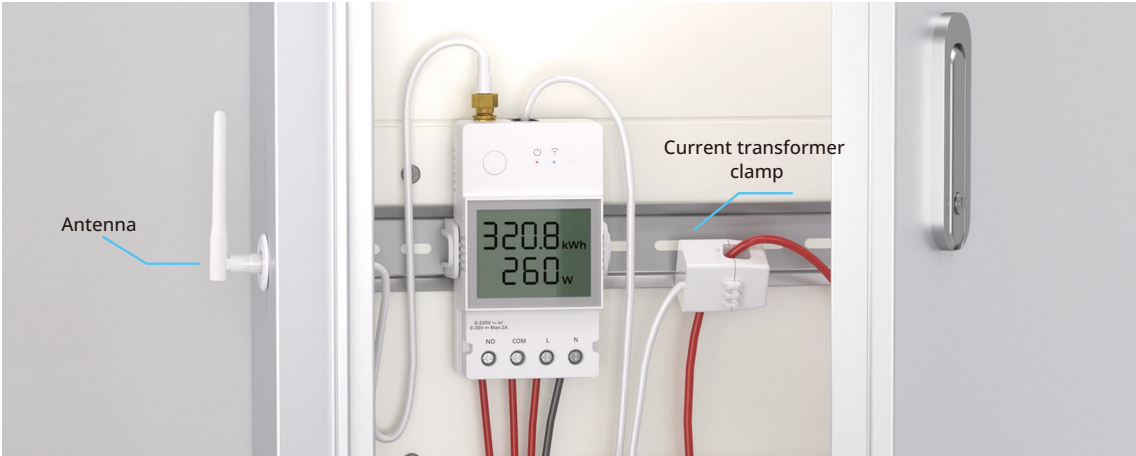

POW Origin/POW Elite

Smart Power Meter Switch

Wi-Fi智开关模块 (电量监测)

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Power Monitoring
电量监测
- 

Single/Countdown Timing
智能定时/延时

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	POWR316, POWR316D: 16A POWR320D: 20A
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	POWR316:98x54x27.5mm POWR316D, POWR320D:98x54x31mm
Net weight 净重:	POWR316: 100g POWR316D POWR320D: 120g
Certification 产品认证:	TUV/CE/FCC/RoHS/SRRC/WWA/CFH



POWR316



POWR316D/POWR320D

POW Ring

Smart Power Meter Switch

智能电量检测开关 (互感器型)

- 

Energy monitoring
能源监控
- 

Overload protection
过载保护
- 

Smart timer
定时例程
- 

History record
历史记录

Rating 额定参数:	100-240V~, 50/60Hz 2W
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Antenna interface type 天线接口类型:	SMA
Transformer interface type 互感器接口类型:	RJ9
Transformer current detection range 互感器电流检测范围:	0-100A
Net weight 净重:	120g (Accessories not included)
Product dimension 产品尺寸:	98x54x31mm
Casing material 外壳材质:	PC
Certification 产品认证:	CE/FCC/RoHS



POWCT

DIY SMART SWITCHES

DIY开关系列



POWR3

Wi-Fi Smart Switch with Energy Monitoring

Wi-Fi智能开关模块(电量监测)

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Power Monitoring
电量监测
- 

Overload protection
过载保护

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	25A
Gang 通道:	1-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	162x122x45.5mm
Net weight 净重:	490g
Certification 产品认证:	CE/FCC/RoHS



4CHPROR3

4-gang Wi-Fi Smart Switch with RF Control

Wi-Fi智能开关模块(四通道+RF遥控)

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

RF Control
RF 控制
- 

Interlock Mode
互锁模式

Rating 额定参数:	100-240V ~50/60Hz (DC: 9-23V)
Max.Load 最大负载:	10A/Gang, 40A/Total
Gang 通道:	4-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & 433MHz
Casing material 外壳材质:	PC V0
Size 尺寸:	145x90x34mm
Net weight 净重:	241g
Certification 产品认证:	CE/FCC/RoHS

*Matching accessories(Refer to the accessory series for details):
RM433R2,RM433R2-BASE,433 RF Controller

*搭配配件 (详情见配件系列) : RM433R2, RM433R2-BASE, 433 RF Controller

4CHR3

4-gang Wi-Fi Smart Switch

Wi-Fi智能开关模块(四通道)

- 


Remote Control
远程控制
- 

Voice Control
语音控制

Rating 额定参数:	100-240V ~50/60Hz
Max.Load 最大负载:	10A/Gang, 16A/Total
Gang 通道:	4-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	145x90x34mm
Net weight 净重:	228g
Certification 产品认证:	CE/FCC/RoHS

DIY SMART SWITCHES

DIY开关系列

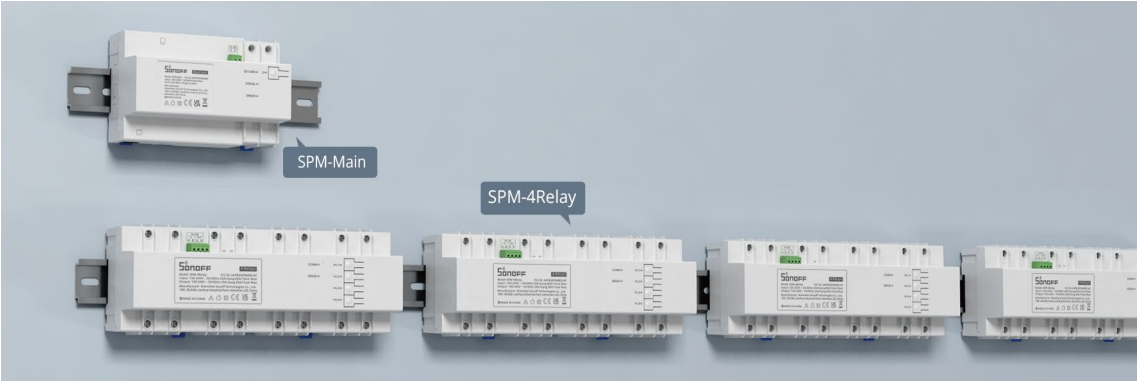

SPM-Main

Smart Stackable Power Meter
智能堆叠式电表

- 

Local Power Monitoring
本地电量统计
- 

LAN Control
局域网功能
- 

Ethernet Connection
支持以太网

Rating 额定参数:	100-240V~, 50/60Hz
Max. Current 最大电流:	50mA
Micro SD card :	Support (8GB-32GB)
Ethernet (SPM-Main) :	Support
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	142.5X90X66.5mm
Net weight 净重:	214g
Certification 产品认证:	CE/FCC/RoHS

SPM-4Relay

Smart Stackable Power Meter
智能堆叠式电表

- 

Remote Control
远程控制
- 

Power Monitoring
电量监测
- 

Overload protection
过载保护

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	20A/Gang
Gang 通道:	4-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	250X90X66.5mm
Net weight 净重:	584g
Certification 产品认证:	CE/FCC/RoHS



iFan04-L/iFan04-H

Wi-Fi Smart Ceiling Fan with Light Controller
Wi-Fi智能风扇灯控制器

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

RF Control
RF 控制
- 

Fan Speed Adjustment
风速调节


Input 输入:	100-240V~, 50/60Hz 5A
Output 输出:	100-240V~, 50/60Hz (Light:3A Fan:2A Max)
Light 灯负载:	iFan04-L(Tungsten lamp: 360W/120V Max LED: 150W/120V Max) iFan04-H(Tungsten lamp: 690W/230V Max LED: 300W/230V Max)
Gang 通道:	2-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & 433MHz
Casing material 外壳材质:	PC V0
Size 尺寸:	116X55X26mm
Net weight 净重:	125g
Certification 产品认证:	CE/FCC/RoHS

*Matching accessories(Refer to the accessory series for details): RM433R2,RM433R2-BASE

*搭配配件 (详情见配件系列) : RM433R2, RM433R2-BASE

SMART PLUGS

插座系列

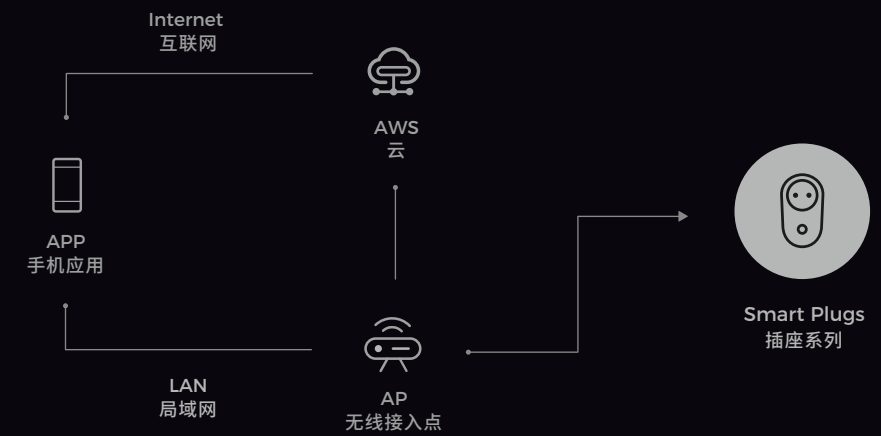

SMART PLUGS

插座系列



S60TPG



S60TPF

S60TPG/S60TPF

Wi-Fi Smart Plug
Wi-Fi智能插座

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Timer Schedule
智能定时/延时
- 

Power Monitoring
电量监测

Rating 额定参数:	250V~, 50/60Hz
Max.Load 最大负载:	S60TPG: 13A S60TPF: 16A
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	S60TPG: 58x58x42mm S60TPF: 50x50x61.5mm
Net weight 净重:	S60TPG: 86g S60TPF: 79g
Certification 产品认证:	CE/RoHS

SMART PLUGS

插座系列



S40

Wi-Fi Smart Plug
Wi-Fi智能插座



Remote Control
远程控制



Voice Control
语音控制



Power Monitoring
电量监测

Rating 额定参数:	Type A: 100V~, 50/60Hz Type B: 120V~, 60Hz
Max.Load 最大负载:	15A
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	76x40x32mm
Net weight 净重:	Type A: 68g Type B: 74g
Certification 产品认证:	Type A: TELEC/PSE/RoHS Type B: ETL/FCC/RoHS



Type A

S40 Lite

Wi-Fi Smart Plug
Wi-Fi智能插座



Remote Control
远程控制



Voice Control
语音控制



eWeLink-Remote
易微联轻智能

Rating 额定参数:	Type A: 100V~, 50/60Hz Type B: 120V~, 60Hz
Max.Load 最大负载:	15A
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	76x40x32mm
Net weight 净重:	Type A: 68g Type B: 74g
Certification 产品认证:	Type A: TELEC/PSE/RoHS Type B: ETL/FCC/RoHS



Type B

SMART PLUGS

插座系列



S31

Wi-Fi Smart Plug with Power Monitoring
Wi-Fi智能插座(电量监测)



Remote Control
远程控制



Voice Control
语音控制



Power Monitoring
电量监测

Rating 额定参数: 120V~, 50/60Hz
Max.Load 最大负载: 15A
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质: PC V0
Size 尺寸: 76x40x33mm
Net weight 净重: 79g
Certification 产品认证: ETL/FCC/RoHS

S31 Lite

Wi-Fi Smart Plug
Wi-Fi智能插座



Remote Control
远程控制



Voice Control
语音控制

Rating 额定参数: 120V~, 50/60Hz
Max.Load 最大负载: 15A
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质: PC V0
Size 尺寸: 76x40x33mm
Net weight 净重: 79g
Certification 产品认证: ETL/FCC/RoHS

S26R2

Wi-Fi Smart Plug
Wi-Fi智能插座




Remote Control
远程控制



Voice Control
语音控制


Rating 额定参数: 250V~, 50/60Hz
Max.Load 最大负载: S26R2TPH: 4000W/16A
S26R2TPN: 4000W/16A
S26R2TPJ: 4000W/16A
S26R2TPL-H: 4000W/16A
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质: PC V0
Size 尺寸: 97.5X56X35mm
Net weight 净重: 85~107g
Certification 产品认证: CE/FCC/RoHS




S26R2TPH
IL



S26R2TPN
BR




S26R2TPJ
CH



S26R2TPL-H
IT

SMART WALL SWITCHES

墙壁开关系列

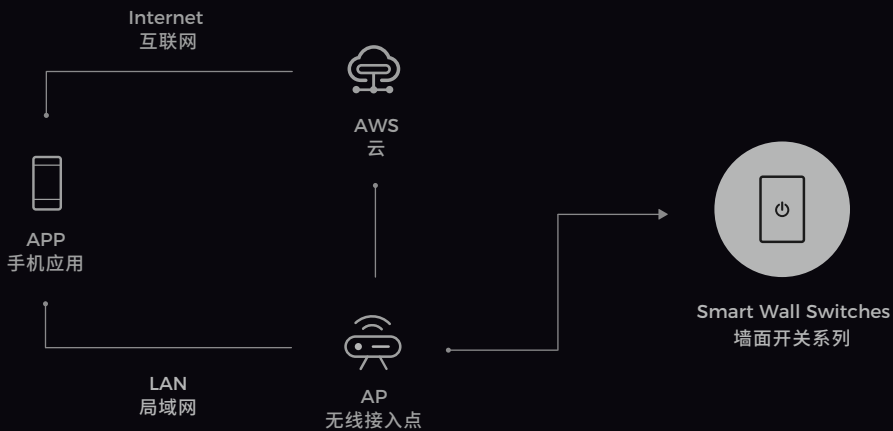

SMART WALL SWITCHES

墙壁开关系列



TX Ultimate

Smart Touch Wall Switch
智能触摸墙壁开关

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Touch Vibration
振感触摸
- 

Light Effects
彩色氛围灯


Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	1C: 5A 2C: 5A/Gang 3C: 5A/Gang 4C: 4A/Gang
Gang 通道:	1-Gang/2-Gang/3-Gang/4-Gang
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC+CRS
Size 尺寸:	86 Type: 86x86x39mm 120 Type: 120x74x39mm
Net weight 净重:	86 Type (1C: 164g 2C: 168.5g 3C: 174g 4C: 181g) 120 Type (1C: 196.6g 2C: 202g 3C: 207.6g 4C: 210g)
Certification 产品认证:	86 Type: CE/SRRC/RoHS 120 Type: CE/FCC/RoHS/ISED



86 Type




120 Type

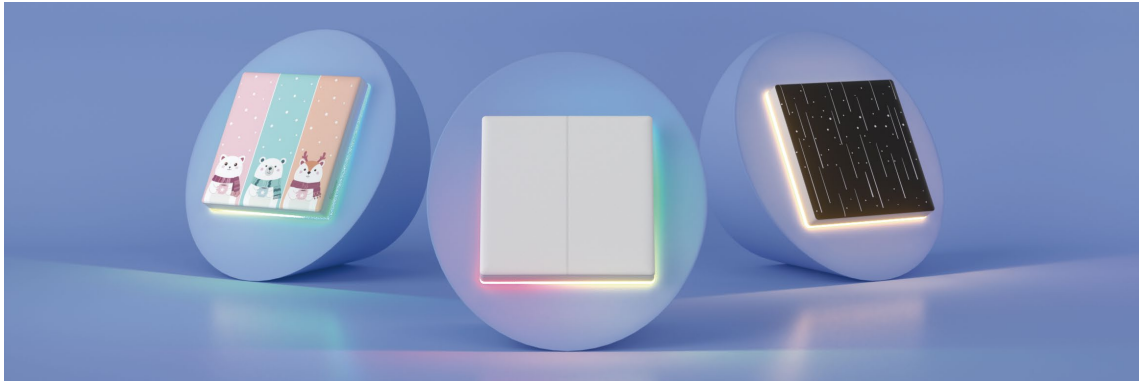

* Star covers and cartoon covers need to be purchased separately.

SMART WALL SWITCHES

墙壁开关系列

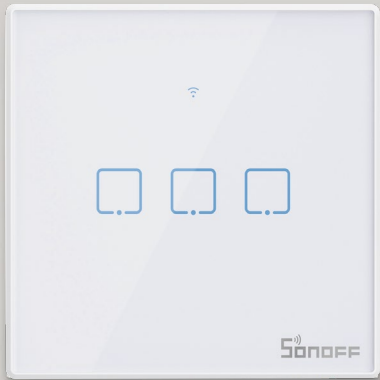

TX

Wi-Fi Smart Wall Switch EU Type
Wi-Fi智能墙壁触摸开关（欧规）



Remote Control
远程控制



RF Control
RF 控制



Touch Control
触摸控制

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	1C: 2A 2C: 2A/Gang 3C: 1A/Gang
Gang 通道:	1-Gang/2-Gang/3-Gang
Support 433MHz RF Control:	T1/T2/T3 Only
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC+Tempered glass panel
Size 尺寸:	86x86x35mm
Net weight 净重:	120~129g
Color 颜色:	White (T0/T1/T2) Black (T3)
Certification 产品认证:	FCC/RoHS



TX

Wi-Fi Smart Wall Switch US Type
Wi-Fi智能墙壁触摸开关（美规）



Remote Control
远程控制



RF Control
RF 控制




Touch Control
触摸控制

Rating 额定参数:	100-240V~, 50/60Hz
Max.Load 最大负载:	2A/Gang
Gang 通道:	1-Gang/2-Gang/3-Gang
Support 433MHz RF Control:	T2/T3 Only
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC+Tempered glass panel
Size 尺寸:	120x74x38mm
Net weight 净重:	147~165g
Color 颜色:	White (T0/T2) Black (T3)
Certification 产品认证:	CE/FCC/RoHS

SMART WALL SWITCHES

墙壁开关系列

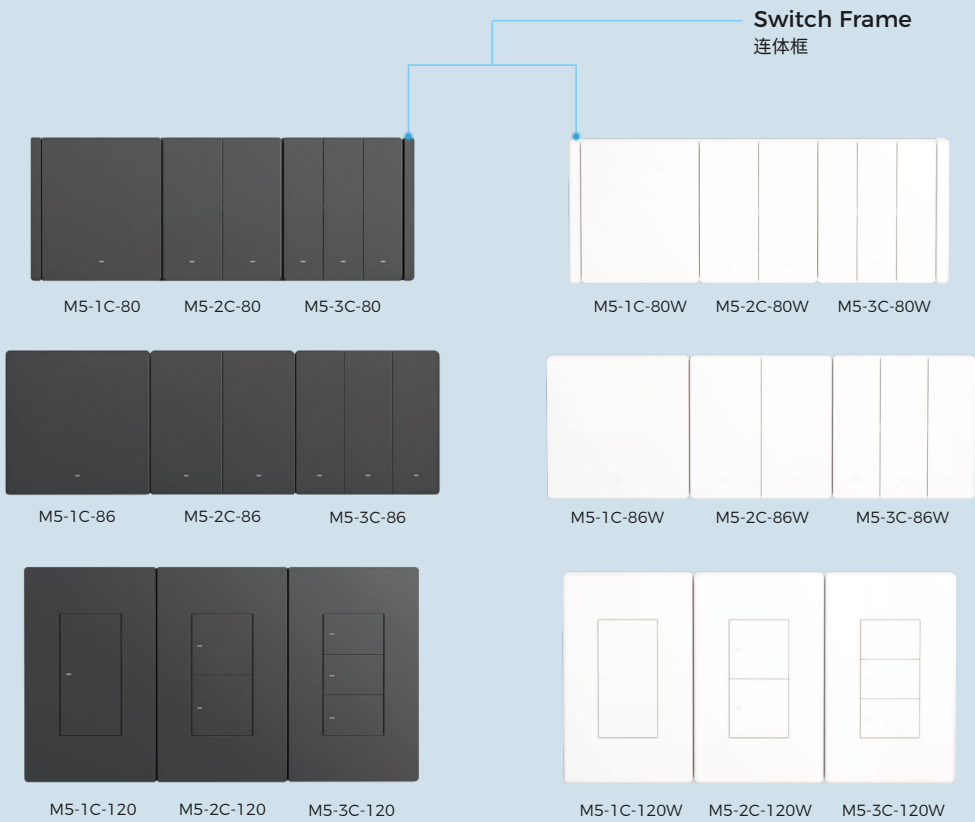

SwitchMan M5

Smart Wall Switch
智能墙壁开关

		
Remote Control 远程控制	Voice Control 语音控制	eWeLink-Remote 易微联轻智能
Rating 额定参数: 100-240V~, 50/60Hz		
Max.Load 最大负载: 1C: 10A 2C: 5A/Gang 3C: 2A/Gang		
Gang 通道: 1-Gang/2-Gang/3-Gang		
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz		
Casing material 外壳材质: PC V0		
Size 尺寸: 80 Type: 86x71x41.5mm 86 Type: 86x86x41.5mm 120 Type: 120x74x41.5mm		
Net weight 净重: 80 Type (1C: 127g 2C: 134g 3C: 137g) 86 Type (1C: 147g 2C: 154g 3C: 156g) 120 Type (1C: 166g 2C: 174g 3C: 176g)		
Color 颜色: Dim Gray (灰色)		
Certification 产品认证: 80 Type: CE/UKCA/RoHS 86 Type: CE/UKCA/CQC/SRRC/RoHS 120 Type: CE/UKCA/FCC/RoHS		

SwitchMan M5

Smart Wall Switch
智能墙壁开关

		
Remote Control 远程控制	Voice Control 语音控制	Single/Countdown Timing 智能定时/延时
Rating 额定参数: 100-240V~, 50/60Hz		
Max.Load 最大负载: 1C: 10A 2C: 5A/Gang 3C: 2A/Gang		
Gang 通道: 1-Gang/2-Gang/3-Gang		
Wireless standard 无线标准: Wi-Fi IEEE 802.11 b/g/n 2.4GHz		
Casing material 外壳材质: PC V0+CRS		
Size 尺寸: 80 Type: 86x71x41.5mm 86 Type: 86x86x41.5mm 120 Type: 120x74x41.5mm		
Net weight 净重: 80 Type (1C: 127g 2C: 134g 3C: 137g) 86 Type (1C: 147g 2C: 154g 3C: 156g) 120 Type (1C: 166g 2C: 174g 3C: 176g)		
Color 颜色: White (白色)		
Certification 产品认证: 80 Type: CE/RoHS 86 Type: CE/CQC/RoHS 120 Type: CE/FCC/ISED/RoHS		

SMART WALL SWITCHES

墙壁开关系列



ZBM5-1C-120W



ZBM5-2C-120W



ZBM5-3C-120W

ZBM5-120W

Zigbee Smart Wall Switch
智能墙壁开关



Remote Control
远程控制



Voice Control
语音控制



Single/Countdown Timing
智能定时/延时




Neutral Wire Optional
可选单火/零火

Rating 额定参数:	1C: 100-240V~ 50/60Hz 10A Max Resistive load μ 2C: 100-240V~ 50/60Hz 10A/gang, Total 10A Max Resistive load μ 3C: 100-240V~ 50/60Hz 10A/gang, Total 10A Max Resistive load μ
LED load LED负载:	1C: 400W@240V, 200W@100V 2C: 400W@240V/gang, 200W@100V/gang, Total 400W@240V, 200W@100V 3C: 400W@240V/gang, 200W@100V/gang, Total 400W@240V, 200W@100V
Min. load 最小负载:	3W (No neutral required input mode)
Gang 通道:	1-Gang/2-Gang/3-Gang
Wireless standard 无线标准:	Zigbee 3.0
Casing material 外壳材质:	PC+CRS
Size 尺寸:	120x74x39.4mm
Net weight 净重:	1C: 176g 2C: 184g 3C:193g
Color 颜色:	White (白色)
Certification 产品认证:	CE/FCC/RoHS

CENTRAL CONTROL PANEL

中控屏系列

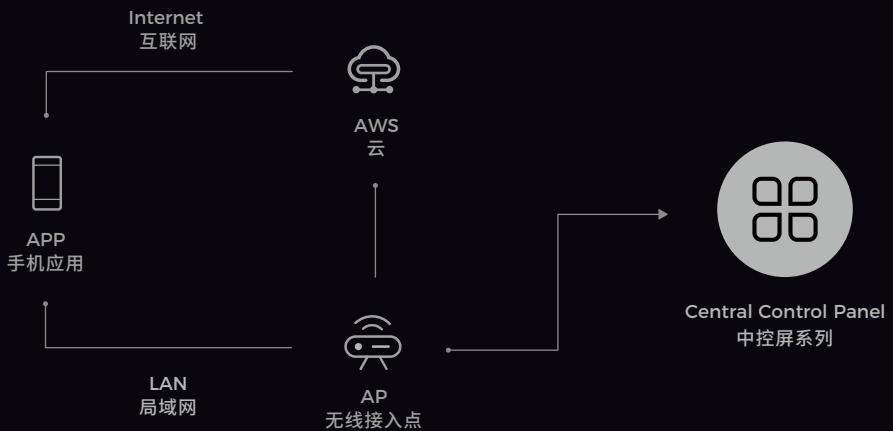

CENTRAL CONTROL PANEL

中控屏系列



NSPanel

Smart Scene Wall Switch

智能场景墙面开关

- 


Remote Control
远程控制
- 

Voice Control
语音控制
- 

Thermostat
温控器
- 

Touch Control
触摸控制

Rating 额定参数：	100-240V~, 50/60Hz
Max.Load 最大负载：	2A/Gang
LED load LED灯负载：	150W/110V/Gang 300W/220V/Gang
Gang 通道：	2-Gang
Wireless standard 无线标准：	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质：	PC V0+CRS+Tempered glass panel (PC V0+冷轧钢+钢化玻璃)
Size 尺寸：	NSPanel-EU/EUW: 86x86x41.7mm NSPanel-US/USW: 120x74x41.7mm
Net weight 净重：	NSPanel-EU/EUW: 180g NSPanel-US/USW: 209g
Color 颜色：	Dim Gray (灰色) White (白色)
Certification 产品认证：	NSPanel-EU/EUW: CE/3C/SRRC/RoHS NSPanel-US/USW: CE/FCC/RoHS

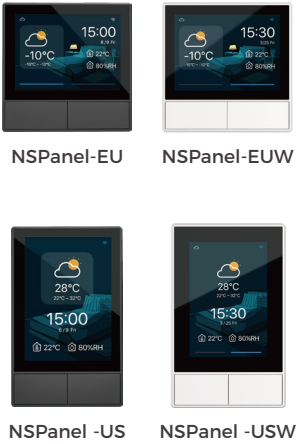

NSPanel86PB/NSPanel86PW



NSPanel120PB/NSPanel120PW

NSPanel Pro

Smart Home Control Panel

智能控制面板

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Thermostat
温控器
- 

Touch Control
触摸控制

Rating 额定参数：	100-240V~, 50/60Hz
Max.Load 最大负载：	5W MAX; 150mA
Wireless standard 无线标准：	Wi-Fi IEEE 802.11 b/g/n 2.4GHz, Zigbee 3.0 IEEE 802.15.4
Screen size 屏幕规格：	86 Type: 3.95", 120 Type:4.7" (Capacitive touch panel)
Screen resolution 屏幕分辨率：	86 Type: 480x480 120 Type: 750x1334
Casing material 外壳材质：	PC V0+CRS+Tempered glass panel (PC V0+冷轧钢+钢化玻璃)
Size 尺寸：	86 Type: 86x86x39.5mm 120 Type: 122.5x74.5x39.5mm
Net weight 净重：	86 Type: 180g 120 Type: 214.8g
Color 颜色：	Dim Gray (灰色) White (白色)
Certification 产品认证：	CE/FCC/RoHS

GATEWAY & SENSORS

网关与传感器系列



是非成败转头空,青山依旧

GATEWAY & SENSORS

网关与传感器系列



iHost

Smart Home Hub
智能家居网关

			
Local, Fast & Reliable automations 本地,灵敏,可靠的自动化	Device data stays local & private 本地 & 私密化的数据存储	Compatible with many device types 兼容多种设备类型	Open API and Add-on integration 开放 API 与 Add-on
Rating 额定参数:	5V --- 2A		
Power interface 电源接口类型:	Type-C		
Ethernet interface 网络接口类型:	RJ45		
Storage expansion method 扩展储存方式:	TF card (TF card supports up to 256GB)		
CPU 处理器:	AlBridge: RV1109 Dual-Core 1.5GHz AlBridge-26: RV1126 Quad-Core 1.5GHz		
NPU 神经网络处理器:	AlBridge: 1.2Tops INT8/INT16 AlBridge-26: 2.0Tops INT8/INT16		
RAM 运行内存:	AlBridge: DDR4 2GB AlBridge-26: DDR4 4GB		
Storage 存储:	eMMC 8GB		
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & Zigbee 3.0 IEEE 802.15.4		
Casing material 外壳材质:	ABS		
Size 尺寸:	120X135.5X41mm		
Net weight 净重:	208g		
Certification 产品认证:	CE/FCC/ISED/RoHS		

ZBBridge Ultra

Zigbee Bridge
Zigbee网关

				
Matter Bridge Matter Bridge	Voice Control 语音控制	Smart Home Security 智能安防	Push Notification 消息推送	ZBBridge-U
Rating 额定参数:	5V --- 1A			
Power supply interface type 电源接口类型:	Type-C			
Network interface type 以太网接口类型:	RJ45 (10/100Mbps)			
CPU 处理器:	Dual-Core 1.5GHz			
RAM 运行内存:	DDR4 1GB			
Storage 存储:	eMMC 8GB			
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & Zigbee 3.0 IEEE 802.15.4			
Casing material 外壳材质:	PC+ABS			
Size 尺寸:	82x82x28mm			
Net weight 净重:	92.5g			
Certification 产品认证:	CE/FCC/ISED/RoHS			



Zigbee 3.0 USB Dongle Plus

Rating 额定参数:	5V $\approx$ 100mA Max
Wireless standard 无线标准:	Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	Aluminum alloy 铝合金
Size 尺寸:	75x25.5x13.5mm
Net weight 净重:	30g
Certification 产品认证:	CE/FCC/RoHS



ZBDongle-E

Matching accessories
(Refer to the accessory series for details)

搭配配件 (详情见配件系列)



USB Male to female extension cable

ZB Bridge-P



Zigbee 网关

Rating 额定参数:	5V $\approx$ 1A
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	PC V0
Size 尺寸:	62x62x20mm
Net weight 净重:	39.5g
Certification 产品认证:	CE/FCC/RoHS



A white, rectangular Zigbee gateway device with a black label featuring the Sonoff logo and 'ZigBee Bridge' text. It is shown on a blue, wavy, abstract surface.

GATEWAY & SENSORS

网关与传感器系列



SNZB-01P

Zigbee Wireless Switch

Zigbee无线开关

Battery model 电池型号:

CR2477 (3V)

Wireless standard 无线标准:

Zigbee 3.0 IEEE 802.15.4

Casing material 外壳材质:

PC V0

Size 尺寸:

45x45x17.7mm

Net weight 净重:

25.6g

Certification 产品认证:

CE/FCC/ISED/RoHS



SNZB-04P

Zigbee Door/Window Sensor

Zigbee无线门窗传感器

Battery model 电池型号:

CR2477 (3V)

Wireless standard 无线标准:

Zigbee 3.0 IEEE 802.15.4

Casing material 外壳材质:

PC+ABS

Size 尺寸:

Transmitter:50.5x32x21.9mm
Magnet:27x12x12.4mm

Net weight 净重:

33g

Certification 产品认证:

CE/FCC/ISED/RoHS



SNZB-02P

Zigbee Temperature and Humidity Sensor

Zigbee温湿度传感器

Battery model 电池型号:

CR2477 (3V)

Wireless standard 无线标准:

Zigbee 3.0 IEEE 802.15.4

Casing material 外壳材质:

PC V0

Size 尺寸:

45x45x17.7mm

Net weight 净重:

25.6g

Certification 产品认证:

CE/FCC/ISED/RoHS



SNZB-06P

Zigbee Human Presence Sensor

Zigbee人体存在传感器

Rating 额定参数:

5V --- 1A

Interface type 接口类型:

Type-C

Wireless standard 无线标准:

Zigbee 3.0 IEEE 802.15.4

Casing material 外壳材质:

PC+ABS

Size 尺寸:

44.2x44.2x59mm

Net weight 净重:

31g

Certification 产品认证:

CE/FCC/ISED/RoHS



SNZB-03P

Zigbee Motion Sensor

Zigbee运动传感器

Battery model 电池型号:

CR2477 (3V)

Wireless standard 无线标准:

Zigbee 3.0 IEEE 802.15.4

Casing material 外壳材质:

PC+ABS

Size 尺寸:

44.2x44.2x59mm

Net weight 净重:


54g

Certification 产品认证:

CE/FCC/ISED/RoHS

GATEWAY & SENSORS

网关与传感器系列

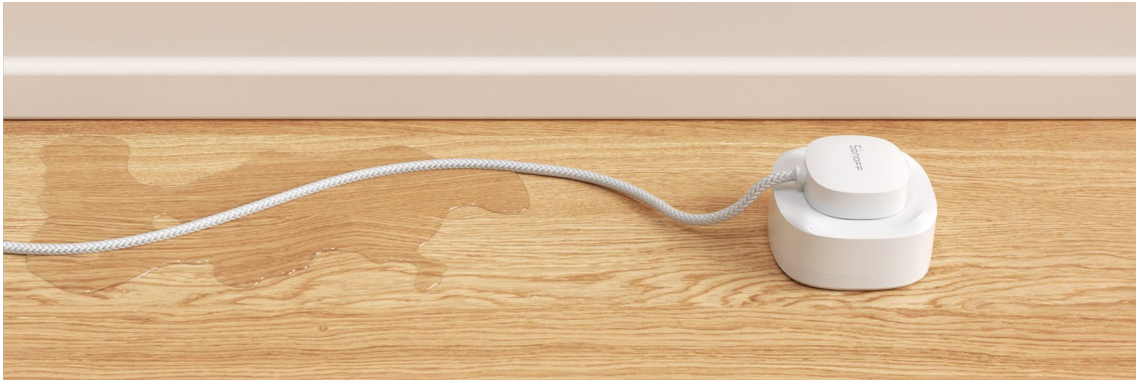

SNZB-05P



Zigbee Water Leak Sensor

Zigbee无线水浸传感器



5-year Battery Life
续航 5 年



IP Rating
防护等级



Extended Detection Support
支持延长探测

Battery model 电池型号: CR2477 (3V)
Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4
IP rating 防护等级: IP67
Casing material 外壳材质: PC+ABS
Size 尺寸: 48x48x21.6mm
Net weight 净重: 45g
Certification 产品认证: CE/FCC/ISED/RoHS

WLDC200

Water Leak Detection Cable

水浸线

Casing material 外壳材质: PC+ABS
Length 长度: 2m (6.5ft)
Net weight 净重: 32g



SNZB-02D



Zigbee LCD Smart Temperature Humidity Sensor

Zigbee 液晶智能温湿度传感器



High Precision
高精度



APP Monitoring
APP 监控



°C / °F Unit Switching
°C / °F 单位切换



Data Storage & Export
数据存储 & 导出

Battery model 电池型号: CR2450 (3V)
Temperature tolerance 温度误差范围: ±0.2 (°C/°F)
Humidity tolerance 湿度误差范围: ±2%RH
Wireless standard 无线标准: Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质: PC+LCD
Size 尺寸: 59.5x62.5x18.5mm
Net weight 净重: 69.5g
Certification 产品认证: CE/FCC/ISED/RoHS



GATEWAY & SENSORS

网关与传感器系列

RF BridgeR2

433MHz RF Bridge

433多功能网关

Rating 额定参数:

5V === 1A

Wireless standard 无线标准:

Wi-Fi: IEEE 802.11 b/g/n & 433MHz

Casing material 外壳材质:

PC V0

Size 尺寸:

62x62x20mm


Net weight 净重:

37.5g

Certification 产品认证:

CE/FCC/RoHS



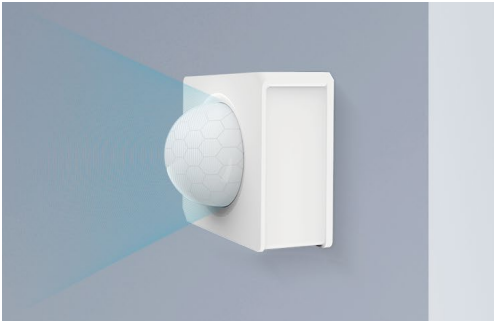

PIR3-RF

Motion Sensor

运动传感器	
Battery model 电池型号:	CR2450 (3V)
Wireless standard 无线标准:	433MHz
Casing material 外壳材质:	PC V0
Size 尺寸:	40x35x28mm
Net weight 净重:	15g
Certification 产品认证:	CE/FCC/RoHS



DW2-RF

RF Wireless Door/Window Sensor

无线门窗传感器	
Battery model 电池型号:	AAA (1.5)x2
Wireless standard 无线标准:	433MHz
Casing material 外壳材质:	PC V0
Size 尺寸:	Transmitter: 70x31x19mm Magnet: 42x14x16mm
Net weight 净重:	27g
Certification 产品认证:	CE/FCC/RoHS



DW2 Wi-Fi

Wi-Fi Wireless Door/Window Sensor

Wi-Fi无线门窗传感器	
Battery model 电池型号:	AAA(1.5)x2
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b 2.4GHz
Casing material 外壳材质:	PC V0
Size 尺寸:	Transmitter: 70x31x19mm Magnet: 42x14x16mm
Net weight 净重:	28g
Certification 产品认证:	CE/FCC/RoHS



BMT01

BBQ Meat Thermometer

BBQ烤肉温度计



Temperature Detection
温度检测



APP Monitoring
APP 监控



°C/°F Unit Switching
°C/°F单位切换



Timer Reminder
定时提醒



Input 输入:	3V $\equiv$ 0.1A (2*1.5V Batteries)
Battery model 电池型号:	AAA (1.5V)
Working temperature (BBQ meat thermometer) 工作温度 (主机):	-10°C~55°C/14~131°F
Working temperature (BBQ meat thermometer probe sensor) 工作温度 (探针):	0~300°C/32~572°F
Casing material 外壳材质:	PC
Size 尺寸:	104.6x71.4x19.2mm
Color 颜色:	Black
Net weight 净重:	100g (Not including batteries and other accessories.)
Certification 产品认证:	CE/FCC/ISED/RoHS


*The package includes two probes. Additional probes can be purchased to expand to four.

MPS01

BBQ Meat Thermometer Probe Sensor


烤肉温度探针

Casing material 外壳材质:	SUS304
Probe length 长度:	15cm
Total length 总长度:	1.5m
Net weight 净重:	0~300°C/32~572°F
Working temperature 工作温度 (探针):	21.5g/pcs
Compatible product 兼容产品:	BMT01



SMART LIGHTING

照明系列

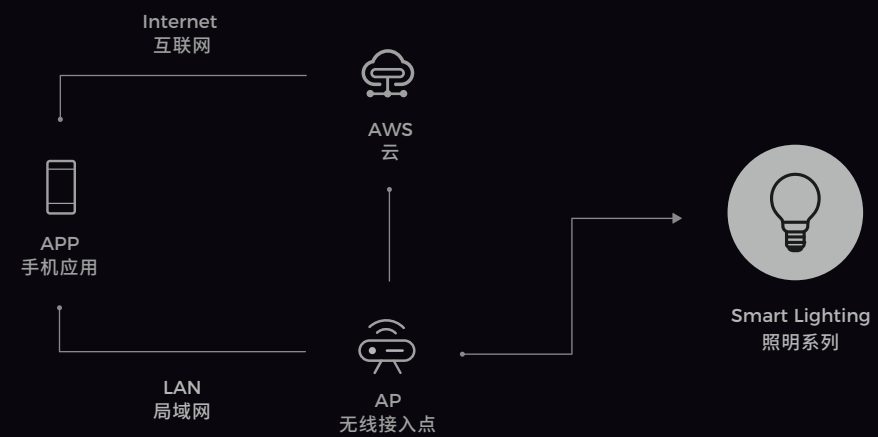



L3-5M

RGB Smart LED Strip Lights

Wi-Fi智能彩光灯带

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Music Reactive Mode
光随乐动
- 

Flexible & Self-adhesive
随意贴

Voltage 工作电压:	5V 
Input 输入 (Controller):	5V 
Output 输出 (Controller):	5V  2A
Max.Load 最大负载 (Controllrer):	10W
Luminous Flux 光通量:	150Lm
IP Rating 防护等级:	IP20
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b 2.4GHz & Bluetooth: 5.0 BLE
Casing material 外壳材质 (Controller):	PC V0
LED Light Strips Length 灯带长度:	5M
Net weight 净重:	138.1g
Certification 产品认证:	CE/FCC/RoHS



L3-5M-P

RGBIC Smart LED Strip Lights

Wi-Fi智能幻彩灯带

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Music Reactive Mode
光随乐动
- 

Flexible & Self-adhesive
随意贴

Voltage 工作电压:	5V 
Input 输入 (Controller):	5V 
Output 输出 (Controller):	5V  2A
Max.Load 最大负载 (Controllrer):	10W
Luminous Flux 光通量:	160Lm
IP Rating 防护等级:	IP54
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b 2.4GHz & Bluetooth: 5.0 BLE
Casing material 外壳材质 (Controller):	PC V0
LED Light Strips Length 灯带长度:	5M
Net weight 净重:	283.7g
Certification 产品认证:	CE/FCC/RoHS



L2-C

L2-2M/L2-5M

Wi-Fi Smart LED RGB Light Strip
Wi-Fi智能彩光灯带

- 

Voice Control
语音控制
- 

Music Reactive Mode
光随乐动
- 

Waterproof
防水
- 

Flexible & Self-adhesive
随意贴

Voltage 工作电压:	12V $\approx$ 2A
Input 输入 (Controller):	12V $\approx$ 2A
Input 输入(Power Adapter):	100-240V~, 50/60Hz 0.6A Max
Max.Load 最大负载 (Controllrer):	36W
Luminous Flux 光通量:	$\geq$ 300Lm
IP Rating 防护等级:	IP65
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b 2.4GHz & Bluetooth: 5.0 BLE
Light Strip material 灯带材质:	FPCB
LED Light Strips Length 灯带长度:	2M/5M
Net weight 净重:	L2-2M: 434.2g L2-5M: 546.2g
Certification 产品认证:	CE/FCC/RoHS



B02-F-A19

Wi-Fi Smart LED Filament Bulb (Creamy White)
Wi-Fi 智能LED灯丝灯（奶白）

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Stepless Dimming
无极调光

Voltage 工作电压：	120V～， 60Hz
Screw Base 接口标准：	E26
CCT 色温：	2700K-5000K
Watt 功率：	7.5W
Luminous Flux 光通量：	720Lm
Wireless standard 无线标准：	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质：	Glass lampshade+Aluminum (玻璃灯罩+铝材)
Size 尺寸：	60x60x110mm
Net weight 净重：	38g
Certification 产品认证：	CE/FCC/RoHS



B02-F-A60

Wi-Fi Smart LED Filament Bulb (Cyan)
Wi-Fi 智能LED灯丝灯（青光）

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Stepless Dimming
无极调光

Voltage 工作电压：	220～240 AC 50/60 Hz
Screw Base 接口标准：	E27
CCT 色温：	2700K-5000K
Watt 功率：	7W
Luminous Flux 光通量：	700Lm
Wireless standard 无线标准：	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质：	Glass lampshade+Aluminum (玻璃灯罩+铝材)
Size 尺寸：	60x60x104mm
Net weight 净重：	35g
Certification 产品认证：	CE/FCC/RoHS



B02-F-ST64

Wi-Fi Smart LED Filament Bulb (Amber)
Wi-Fi 智能LED灯丝灯（琥珀）

- 

Remote Control
远程控制
- 

Voice Control
语音控制
- 

Stepless Dimming
无极调光

Voltage 工作电压：	220～240 AC 50/60 Hz
Screw Base 接口标准：	E27
CCT 色温：	1800K-5000K
Watt 功率：	7W
Luminous Flux 光通量：	600Lm
Wireless standard 无线标准：	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质：	Glass lampshade+Aluminum (玻璃灯罩+铝材)
Size 尺寸：	60x60x138mm
Net weight 净重：	50g
Certification 产品认证：	CE/FCC/RoHS



B02-BL-A60

Wi-Fi Smart LED Bulb

Wi-Fi 智能LED双色球泡灯



Remote Control
远程控制



Voice Control
语音控制



Stepless Dimming
无极调光

Voltage 工作电压：	120V～，50Hz
Screw Base 接口标准：	E27
CCT 色温：	2700K-6500K
Watt 功率：	9W
Luminous Flux 光通量：	806Lm
Wireless standard 无线标准：	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质：	PC lampshade+Thermal insulation lamp body+Aluminum (PC灯罩+导热绝缘灯体+铝材)
Size 尺寸：	60x60x112mm
Net weight 净重：	40g
Certification 产品认证：	CE/RoHS



B05-BL-A60/A19

Wi-Fi Smart RGB LED Bulb

Wi-Fi 智能五彩LED球泡灯



Remote Control
远程控制



Voice Control
语音控制



Stepless Dimming
无极调光




eWeLink-Remote
易微联轻智能

Voltage 工作电压：	A19: 120V～，60Hz A60: 220-240V～，50Hz
Screw Base 接口标准：	A19: E26 A60: E27
CCT 色温：	2700K-6500K
Watt 功率：	9W
Luminous Flux 光通量：	806Lm
Wireless standard 无线标准：	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质：	PC lampshade+Thermal insulation lamp body+Aluminum (PC灯罩+导热绝缘灯体+铝材)
Size 尺寸：	60x60x112mm
Net weight 净重：	40g
Certification 产品认证：	A19: UL/FCC/RoHS A60: CE/RoHS

SECURITY CAMERAS

摄像头系列

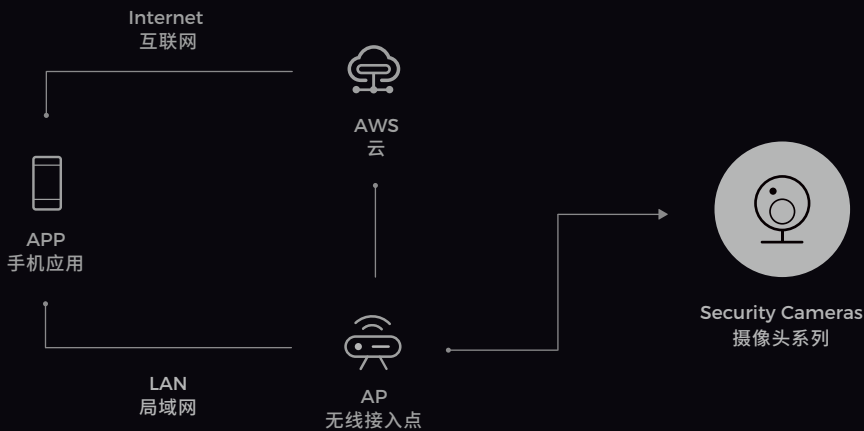

SECURITY CAMERAS

摄像头系列



CAM Slim Gen2

Wi-Fi Smart Security Camera

Wi-Fi智能监控摄像头

- 

Two-way Audio
双向对话
- 

IR Night Vision
红外夜视
- FHD

1080P Live View
1080P 高清图像
- 

Motion detection
移动侦测
- 

Support cloud storage
支持云存储

Input 输入:	5V $\approx$ 1A
Interface type 接口类型:	Type-C
Resolution 分辨率:	1920x1080
Lens Aperture 光圈:	F2.0
Storage location 存储方式:	Cloud storage and TF card (Max.128GB for TF card)
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	PC+ABS
Size 尺寸:	48x46x86.5mm
Net weight 净重:	65g (Accessories not included)
Certification 产品认证:	CE/FCC/RoHS



CAM-S2



TPG-UK



TPB-US



TPI-AU



TPF-DE

GK-200MP2-B

Wi-Fi Wireless IP Security Camera

Wi-Fi智能云台监控摄像头

- 

Two-way Audio
双向对话
- 

IR Night Vision
红外夜视
- FHD


1080P Live View
1080P 高清图像
- 

Support cloud storage
支持云存储

Input 输入:	5V $\approx$ 1.2A
Resolution 分辨率:	1080P
Lens Aperture 光圈:	F1.2
Storage 扩展卡:	TF Card (Max 128GB)
Wireless standard 无线标准:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Casing material 外壳材质:	ABS
Size 尺寸:	Fold: 109X109X80mm UnFold: 109X109X120mm
Net weight 净重:	221g
Certification 产品认证:	CE/FCC/RoHS

HOME APPLIANCES

生活电器系列

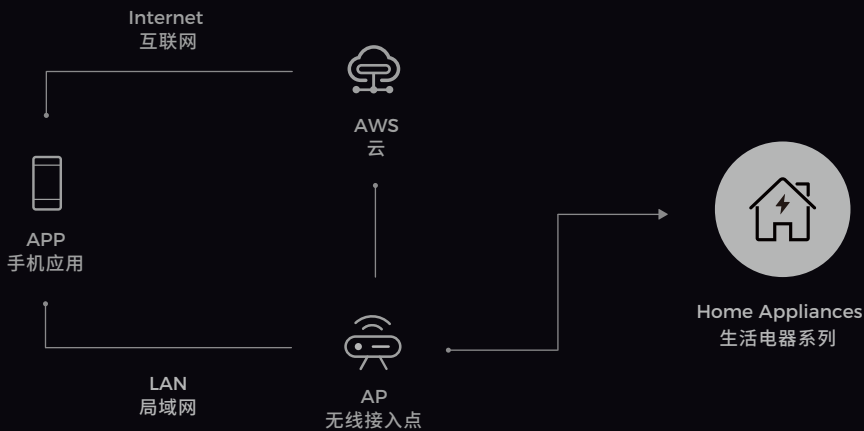

HOME APPLIANCES

生活电器系列



TRVZB

Thermostatic Radiator Valve
智能温控阀

- 

Remote Control
远程控制
- 

Timing Schedule
智能定时/延时
- 

Precise Temperature Control
精确的温度控制
- 

Child Safety Lock
童锁

Input 输入:	4.5V $\equiv$ (3x1.5V AA Batteries)
Battery model 电池型号:	1.5V LR6 Alkaline AA Battery
Threaded connection 螺纹接口:	M30x1.5mm
Temperature setting range 温度设定范围:	4°C-35°C
Wireless standard 无线标准:	Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	PC
Size 尺寸:	59.4x59.4x95mm
Net weight 净重:	157g
Certification 产品认证:	CE/RoHS



SWV-NH/SWV-BSP

Zigbee Smart Water Valve
Zigbee智能水阀

- 

APP control
APP 控制
- 

Timed watering
定时浇水
- 

Cyclic irrigation
循环灌溉
- 

Water consumption statistics
用水量统计

Rating 额定参数:	6V $\equiv$ (4x1.5V AA Batteries)
Communication distance 通信距离:	130M (open space)
Waterproof 防水等级:	IP55
Working Pressure 工作压力:	0.06~0.8 MPa
Watering Temperature 工作水温:	5~40°C
Wireless standard 无线标准:	Zigbee 3.0 IEEE 802.15.4
Casing material 外壳材质:	PC+ABS
Size 尺寸:	152x100x46mm
Net weight 净重:	278g
Certification 产品认证:	CE/FCC/ISED



ACCESSORIES

配件系列



Accessories
配件系列

WTS01

Waterproof Temperature Sensor

防水温度传感器

Compatible Products 兼容产品:	TH Origin/ TH Elite
Interface/Connector types 接口/连接器类型:	RJ9 4P4C
Temp. Measuring 测量温度范围:	-10°C ~+85°C
Working Temperature 工作温度:	-40°C~+115°C
Cable length 电线长度:	1.5M
Casing material 外壳材质:	PVC
Net weight 净重:	36.3g



THS01

Temp. & Hum. Sensor

温湿度传感器

Compatible Products 兼容产品:	TH Origin/ TH Elite
Temp. Measuring 测量温度范围:	-40°C~+85°C
Working humidity 工作湿度:	0~100RH%
Cable length 电线长度:	0.5M
Casing material 外壳材质:	ABS V0
Net weight 净重:	21.7g



RL560

Sensor Extension Cable

RJ9接口传感器延长线

Compatible Products 兼容产品:	TH Origin/ TH Elite
Interface/Connector types 接口/连接器类型:	RJ9 4P4C
Cable length 电线长度:	5M
Casing material 外壳材质:	PVC V0
Net weight 净重:	75.0g



MS01

Soil Moisture Sensor

土壤湿度传感器

Compatible Products 兼容产品:	TH Origin/ TH Elite
Working Temperature 工作温度:	0°C~60°C
Working humidity 工作湿度:	0~100RH%
Cable length 电线长度:	0.5M
Casing material 外壳材质:	PC V0
Net weight 净重:	28.9g

T2EU1C/2C/3C-RF

Stick-on Switch (Remote Controller)

随意贴开关（遥控器）



RF Control
RF 控制



Touch Control
触摸控制


Battery model 电池型号: CR2032 (3V)X2
Control distance 操控距离: >50M(Open space)
Gang 通道: 1-Gang/2-Gang/3-Gang
Wireless standard 无线标准: 433MHz
Casing material 外壳材质: PC+Tempered glass panel (PC+钢化玻璃)
Size 尺寸: 86x86x9mm
Net weight 净重: 80g



T2EU1C-RF



T2EU2C-RF



T2EU3C-RF



R5



R5W

SwitchMan R5


SONOFF SwitchMan Scene Controller

松诺场景遥控器R5（6键）



eWeLink-Remote
易微联轻智能

Battery model 电池型号: CR2032 (3V)X2
Control distance 操控距离: Max. 90M (Open space)
Numbers of button 按键数量: 6
Casing material 外壳材质: PC V0+Tempered glass panel (PC V0+钢化玻璃)
Size 尺寸: 86x86x13.5mm
Net weight 净重: 91g
Color 颜色: Dim Gray(灰色) White(白色)

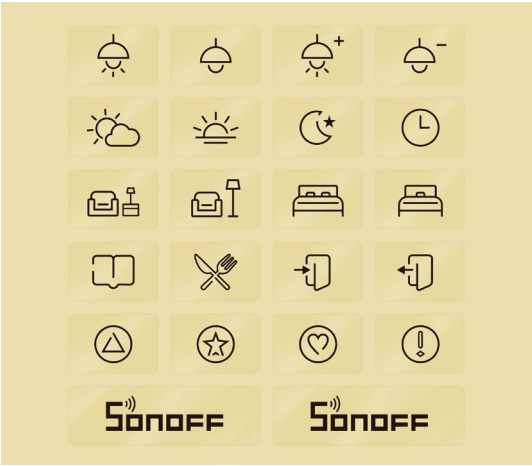

Button sticker
按键图标贴纸

ACCESSORIES

配件系列



Waterproof box R2

Waterproof Box

防水盒

Compatible Products 兼容产品： TH Elite/TH Origin/POW Elite/POW Origin/BASIC Series/DUALR2/POWR2/NSPanel Pro/M5 Series/TX Series/NSPanel Series

Casing material 外壳材质： PC V0
Size 尺寸： 152.5x100x48mm
Net weight 净重： 204.3g
Color 颜色： Transparent tawny



Switch Frame

SONOFF Switch Frame 2-Gang/3-Gang/4-Gang

松诺墙壁2位/3位/4位连体框开关连体框

Casing material 外壳材质： PC V0
Size 尺寸： 2-Gang:157x86x14.8mm
3-Gang:228x86x14.8mm
4-Gang:299x86x14.8mm
Net weight 净重： 2-Gang:44.4g
3-Gang:56.6g
4-Gang:72.2g
Color 颜色： Dim Gray(灰色) White(白色)



*The Switch Frame is optional to install M5-80 only and the mounting box.

*开关连体框可选, 仅适用于M5-80和暗盒安装。

ACCESSORIES

配件系列



DR

DIN Rail Tray

导轨固定器

Compatible Products 兼容产品: BASICR2/RF/BASICR3/RFR3/DUALR2/POWR2/TH10/TH16
Casing material 外壳材质: ABS V0
Size 尺寸: 122x54x14mm
Net weight 净重: 21.4g



USB Male to female extension cable

USB Male to female extension cable

USB延长线

Net weight 净重: 59.3g



Motion Sensor-BASE

Motion Sensor-BASE

运动传感器-万向座

Compatible Products 兼容产品: PIR3-RF, SNZB-03
Casing material 外壳材质: PC V0
Size 尺寸: 43x38x45mm
Net weight 净重: 13.3g



StandB/W

Enclosure Stand


底座

Casing material 外壳材质: PC V0
Size 尺寸: 121x88.5x67.5mm
Net weight 净重: 108.5g
Color 颜色: Dim Gray(灰色) White(白色)



NFC-Tag

NFC Card Size 卡片尺寸: 85.5x54mm
Tag Size 标签尺寸: 18x18mm
Net weight 净重: 8.2g

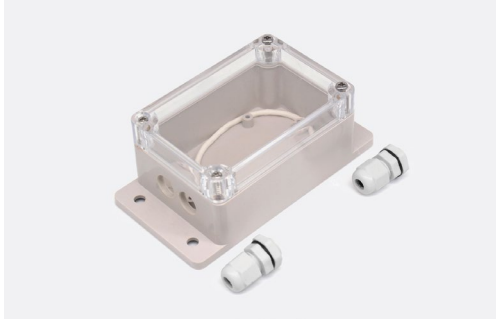

Waterproof Case-IP66

IP66 Waterproof Case

IP66防水盒

Compatible Products 兼容产品: BASICR2/RF/BASICR3/RFR3/DUALR2/POWR2/TH10/TH16
Casing material 外壳材质: ABS V0
Size 尺寸: 135x72x52mm
Net weight 净重: 107.8g



5V USB Power Adapter (Type-E/F)

5VUSB适配器（欧规）

Input 输入：	100-240V～， 50/60Hz 0.35A Max
Output 输出：	5V $\equiv$ 2A 10.0W
Casing material 外壳材质：	PC V0
Size 尺寸：	40.5x34.5x21mm
Net weight 净重：	43.1g



5V USB Power Adapter (Type-I)

5VUSB适配器（澳规）

Input 输入：	100-240V～， 50/60Hz 0.3A Max
Output 输出：	5V $\equiv$ 2A 10.0W
Casing material 外壳材质：	PC V0
Size 尺寸：	47x35.5x24mm
Net weight 净重：	40.0g



5V USB Power Adapter (Type-A/B)

5VUSB适配器（美规）

Input 输入：	100-240V～， 50/60Hz 0.35A Max
Output 输出：	5V $\equiv$ 2A 10.0W
Casing material 外壳材质：	PC V0
Size 尺寸：	40.5x34.5x21mm
Net weight 净重：	36.5g



5V USB Power Adapter (Type-G)

5VUSB适配器（英规）

Input 输入：	100-240V～， 50/60Hz 0.3A Max
Output 输出：	5V $\equiv$ 2A 10.0W
Casing material 外壳材质：	PC V0
Size 尺寸：	48x44x22.5mm
Net weight 净重：	43.6g



TPG-UK

AC Adapter（UK）

电源适配器（英规）

Input 输入：	100-240V～， 50/60Hz 0.3A Max
Output 输出：	5V $\equiv$ 1200mA
Casing material 外壳材质：	PC V0
Size 尺寸：	61x50x46mm
Cable length 电线长度：	1.2M
Net weight 净重：	92.3g



TPI-AU

AC Adapter（AU）

电源适配器（澳规）

Input 输入：	100-240V～， 50/60Hz 0.3A Max
Output 输出：	5V $\equiv$ 1200mA
Casing material 外壳材质：	PC V0
Size 尺寸：	61x39.8x47mm
Cable length 电线长度：	1.2M
Net weight 净重：	84.8g



TPB-US

AC Adapter（US）

电源适配器（美规）

Input 输入：	100-240V～， 50/60Hz 0.3A Max
Output 输出：	5V $\equiv$ 1200mA
Casing material 外壳材质：	PC V0
Size 尺寸：	61x26x44mm
Cable length 电线长度：	1.2M
Net weight 净重：	79.0g



TPF-DE

AC Adapter（DE）

电源适配器（德规）

Input 输入：	100-240V～， 50/60Hz 0.3A Max
Output 输出：	5V $\equiv$ 1200mA
Casing material 外壳材质：	PC V0
Size 尺寸：	61x26x56mm
Cable length 电线长度：	1.2M
Net weight 净重：	83.0g

ACCESSORIES

配件系列



RM433R2

8-key 433MHz Remote Controller

433MHz无线遥控器 (8键)

Compatible Products 兼容产品: RF/RFR3/4CHPROR3/iFan03/SlampherR2 / TX Series*(T2/T3)/RF Bridge D1*(On the way...)

Battery model 电池型号: CR2450 (3V)X2

Wireless standard 无线标准: 433MHz

Casing material 外壳材质: PC V0

Size 尺寸: 87x45x12mm

Net weight 净重: 47.0g

RM433R2-BASE

433MHz Remote Controller Base

433MHz无线遥控器底座


Compatible Products 兼容产品: RM433R2

Temp.Measuring 配件: 3M Tapes/Screws

Casing material 外壳材质: PC V0

Size 尺寸: 86x86x15mm

Net weight 净重: 52.2g

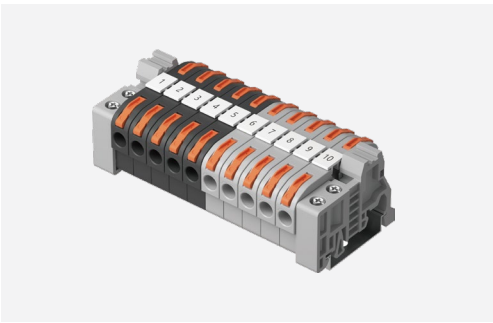

211

Din Rail Wire Connectors

211 导轨按压接线端子

Rated voltage 额定电压: 250V

Rated current 额定电流: 32A

Contact material 接触点材质: Red copper

Insulation material 绝缘材质: PA

Package size 包装尺寸: 190x132x23mm



D1-1

Wire Splicing Connectors

D1-1 拼接电线连接器

Rated voltage 额定电压: 250V

Rated current 额定电流: 32A

Contact material 接触点材质: Red copper

Insulation material 绝缘材质: PC

Package size 包装尺寸: 165x87x17mm



433 RF Controller

4-key 433MHz Remote Controller

433MHz无线遥控器 (4键)


Battery model 电池型号: CR2032

Wireless standard 无线标准: 433MHz

Casing material 外壳材质: ABS V0

Size 尺寸: 55x30x14mm

Net weight 净重: 24.8g

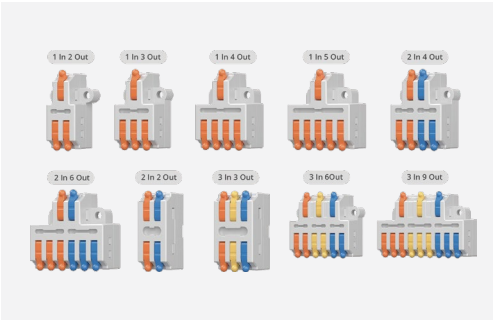

D1-2

Quick Wire Connectors

D1-2 快速接线端子

Rated voltage 额定电压: 250V

Rated current 额定电流: 32A

Contact material 接触点材质: Red copper

Insulation material 绝缘材质: PC

Package size 包装尺寸: 210x112x30mm

SONOFF ECOSYSTEM

Innovative Product

DIY SMART SWITCHES



CENTRAL CONTROL PANEL



SMART WALL SWITCHES



GATEWAY & SENSORS



SECURITY CAMERAS



SMART LIGHTING



SMART PLUGS



HOME APPLIANCES




ACCESSORIES



Software




eWeLink APP
Andriod/iOS



eWeLink Web



eWeLink Cast



In-Vehicle
Infotainment

Wireless Communication



RF433MHz

Cloud Solution



Global Cloud



Open API



Developer SDK



GDPR.EU



SaaS



PaaS



Private Deployment

LAN Solution



Security Management



Camera Viewer



Local Scene



Add-on



Open API

Third-Party Application



Open-Source Compatible Application



Home Assistant



HomeSeer



OpenHAB



ioBroker



Zigbee2MQTT



Domoticz



Jeedom

Third-Party Integrated Products

