YOUR SMART HOME CHOICE

PRODUCT
BROCHURE

Shenzhen Sonoff Technologies Co.,Ltd

Address

3F & 6F, Bldg A, No. 663, Bulong Rd, Dafapu Community,
Bantian St, Longgang Dist, Shenzhen, GD, China

Web

https://sonoff.tech

Tel

+86-755-27955416

About SONOFF

Shenzhen Sonoff Technologies Co.,Ltd located in Shenzhen, China, is a top-ranking smart home automation manufacturer specializing in R&D, design, production and marketing.

SONOFF is an independent brand integrating software and hardware, the products are known for quality and innovation. The main technologies SONOFF products based on are Wi-Fi, ZigBee and other mainstream communication protocols, and different communication protocols can be configured according to customer needs and using scenarios.

Our Vision: Making life easier

Our Commission: SONOFF is fully committed to fulfilling home automation for a simple and smart life.

Company Timeline

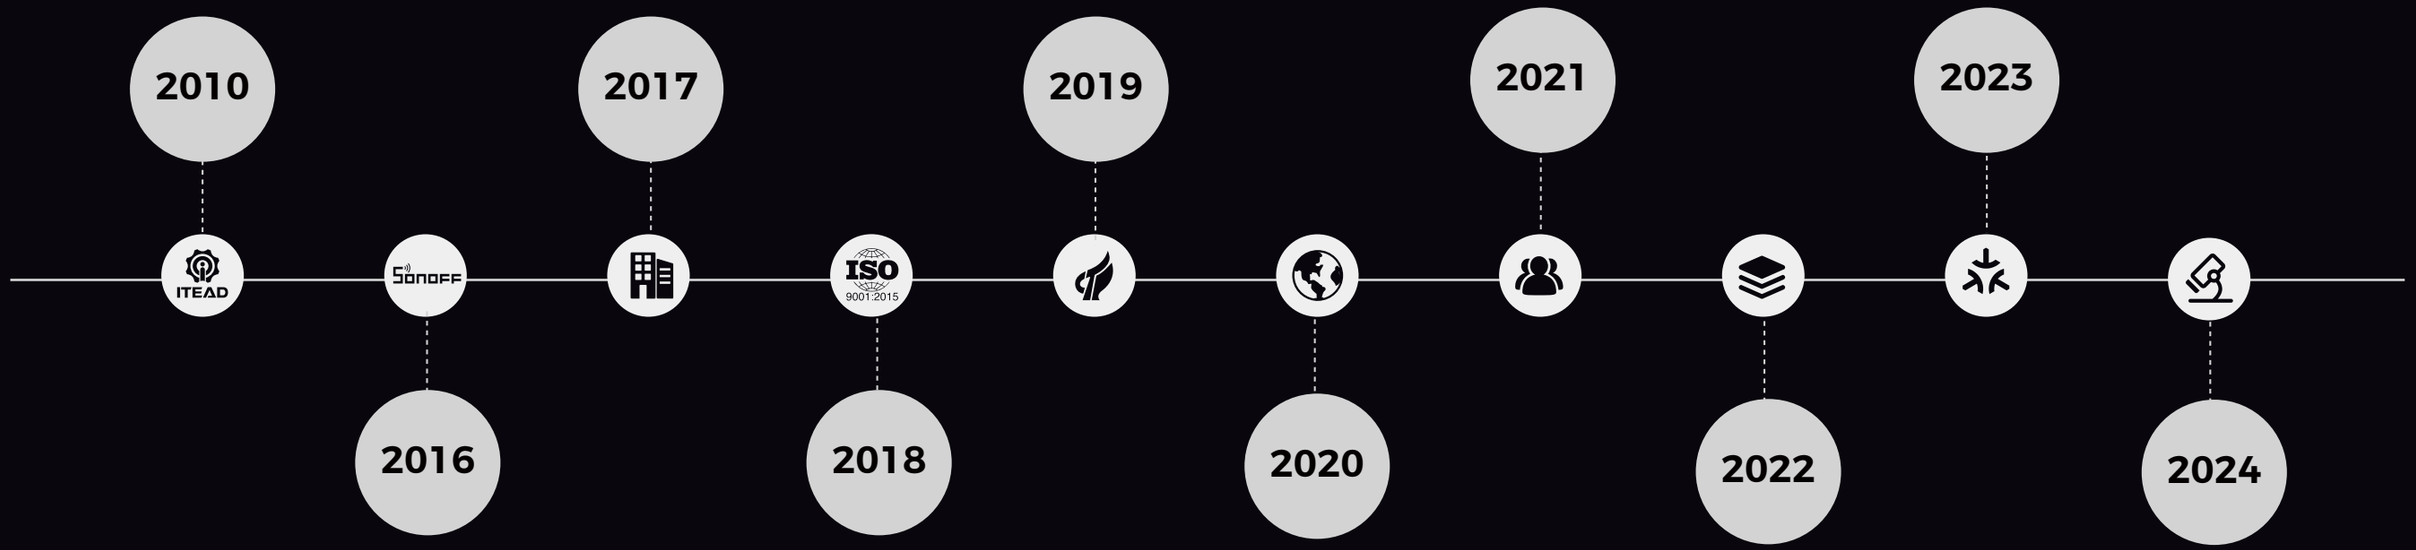

- ITEAD Studio was founded
- Open source hardware development
- Operate iteadstudio.com

- ITEAD - smart home hardware
- SONOFF - smart on and off
- BASIC - the First “Smart DIY Switch”

- SONOFF brand
- SHENZHEN SONOFF TECHNOLOGIES CO., LTD.

- Web: sonoff.tech
- Awarded ISO9001:2015
- Partner with HUAWEI

- CE/FCC/RoHS/UL/ETL
- Invest US$3M in R&D laboratory
- The National High and New Technology Enterprise

- TUV/ANATEL/NOM/VOC
- 50+ distributors around the world
- Smaller DIY device MINI

- B2B order system b2b.itead.cc
- SONOFF Joined Matter
- New office 5000㎡
- Crowdfunding campaign on Kickstarter

- SONOFF Ecosystem
- 100+ patents

- SONOFF Matter Products
- 13,300㎡ Warehouse

- 200+ employees
- Over 50% R&D personnel engaged in the professional technical team

SONOFF Ecosystem	5000㎡ Headquarters	13300㎡ Warehouse	50+ Global Distribution Network
BASIC The First "Smart DIY Switch"	30+ Customer Service Personnel	90+ Marketing Employees	100+ R&D Engineers
15M Global Users	150+ Countries and Areas	300+ SKU / Smart Devices	20M Annual Capacity

AUTHORITATIVE CERTIFICATE

100+ Patents

ISO9001:2015

Certificate of High and New Technology

TÜV Certified Compliance

SONOFF smart devices support to work with the following AIoT ecosystems

works with alexa

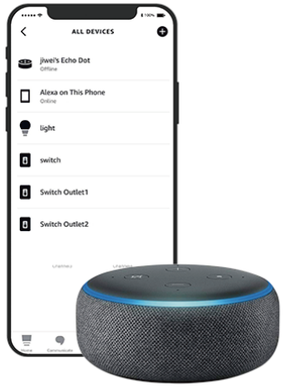

works with Google Home

works with Alice

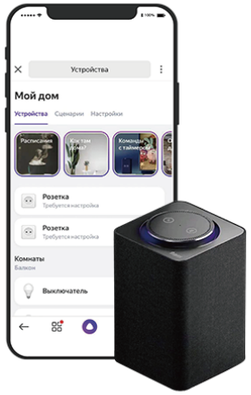

works with HUAWEI HiLink

works with mijia

works with DuerOS

works with SmartThings

Hey Siri

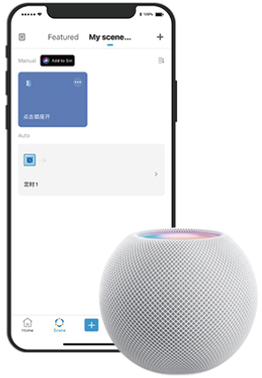

works with IFTTT

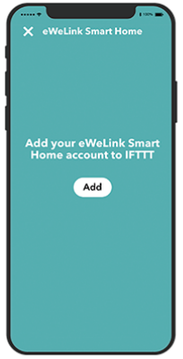

works with AliGenie

works with Midea Meiju

SONOFF Smart Device Work with eWeLink APP

- Remote Control
- Share Control
- Timer Schedule
- Power on State
- History Operation Record
- Sync Status
- LAN Control
- Voice Control
- EN Multi-language Operation
- Smart Scene
- Inching Mode
- Camera Feature
- Interlocking
- Group Control

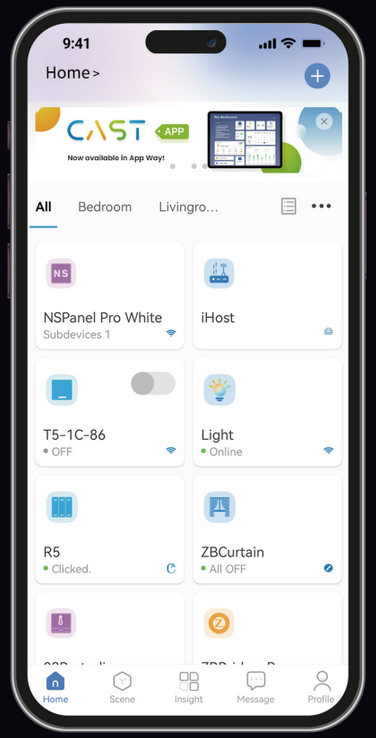

eWeLink

Download on the App Store

GET IT ON Google Play

CATALOGS

- DIY SMART SWITCHES — 01 - 22
- SMART PLUGS — 23 - 28
- SMART WALL SWITCHES — 29 - 46
- CENTRAL CONTROL PANEL — 47 - 50
- GATEWAY & SENSORS — 51 - 68
- SECURITY CAMERAS — 69 - 74
- HOME APPLIANCES — 75 - 78
- ACCESSORIES — 79 - 92

DIY SMART SWITCHES

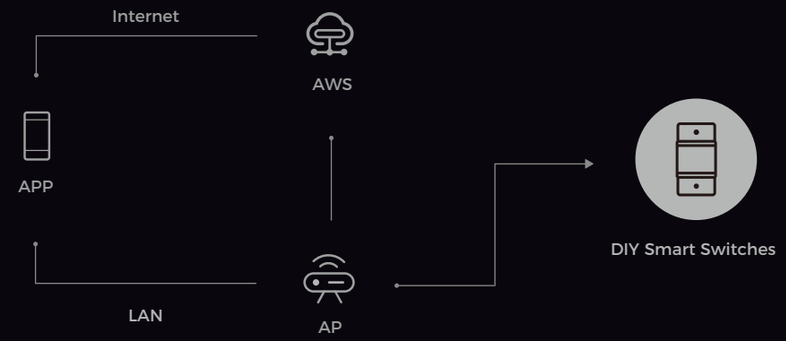

ZBMINI Extreme zigbee

Zigbee Smart Switch (No Neutral Required)

Remote Control | Voice Control | No Neutral Wire Required

Model:	ZBMINIL2
Rating:	100-240V~ 50/60Hz 6A
Wireless standard:	Zigbee 3.0
Net weight:	22g
Dimension:	39.5x32x18.4mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/TUV/RoHS/ISED

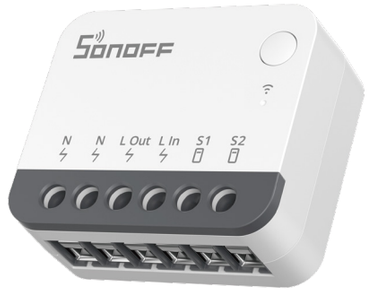

ZBMINI Extreme zigbee

Zigbee Smart Switch (Neutral Wire Required)

Remote Control | Voice Control | Timer Schedule

Model:	ZBMINIR2
Rating:	100-240V~ 50/60Hz 10A Max Resistive Load μ
Wireless standard:	Zigbee 3.0
Net weight:	26.7g
Dimension:	39.5x33x16.8mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/ISED/RoHS

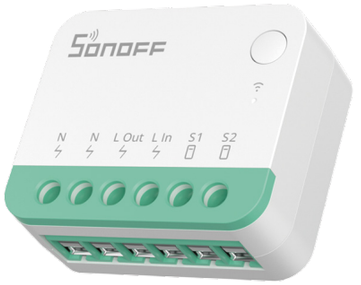

MINI Extreme matter

Wi-Fi Smart Switch

Remote Control | Voice Control | Timer Schedule

Model:	MINIR4M
Rating:	100-240V~ 50/60Hz 10A
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	26.7g
Dimension:	39.5x33x16.8mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/RoHS/TUV/ISED/SRRC/Matter

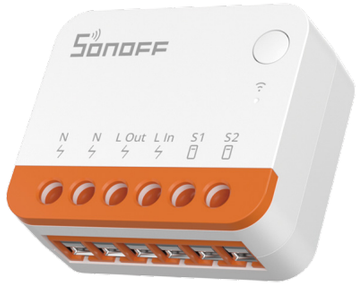

MINI Extreme

Wi-Fi Smart Switch

Remote Control | Voice Control | Single/Countdown Timing

Model:	MINIR4
Rating:	100-240V~ 50/60Hz 10A
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	26.7g
Dimension:	39.5x33x16.8mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/RoHS/SRRC/TUV/ISED

MINI DUO matter

2-Gang Matter Over WiFi Smart Switch

Remote Control | Voice Control | Timer Schedule

Model:	MINI-2GS
Rating:	110-240V~ 50/60Hz 10A/gang, Total 16A MAX
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Diameter of wiring (recommend):	16AWG to 14AWG SOL/STR copper conductor only
Net weight:	36.5g
Dimension:	45x39.4x16.8mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

MINI DUO zigbee

2-Gang Zigbee Smart Switch

Supports External Switch | Relay function

Model:	MINI-ZB2GS
Rating:	110-240V~ 50/60Hz 10A/gang, Total 16A MAX
Wireless standard:	Zigbee IEEE 802.15.4
Diameter of wiring (recommend):	16AWG to 14AWG SOL/STR copper conductor only
Net weight:	36.2g
Dimension:	45x39.4x16.8mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

MINI DUO-L zigbee

2-Gang Zigbee Smart Switch (No Neutral Required)

No Neutral Wire Required | No By-pass Module Needed

Model:	MINI-ZB2GS-L
Rating:	110-240V~ 50/60Hz 10A/gang, Total 12A MAX
Wireless standard:	Zigbee IEEE 802.15.4
Diameter of wiring (recommend):	16AWG to 14AWG SOL/STR copper conductor only
Net weight:	33g
Dimension:	45x39.4x16.8mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

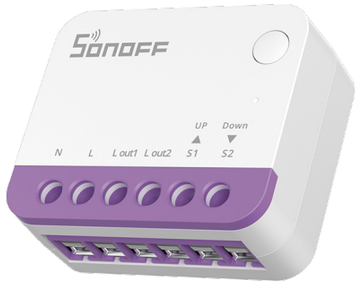

MINI-RBS matter

Smart Roller Shutter Switch

Remote Control | Voice Control | Percentage Control

Model:	MINI-RBS
Rating:	100-240V~ 50/60Hz 1A Max
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Pollution degree:	2
Rated impulse voltage:	4kV
Automatic action:	10000 Cycles
Control type:	Type 1.B
Diameter of wiring(recommend):	18AWG to 14AWG SOL/STR copper conductor only
Net weight:	25.1g
Dimension:	39.5x33x16.8mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/RoHS

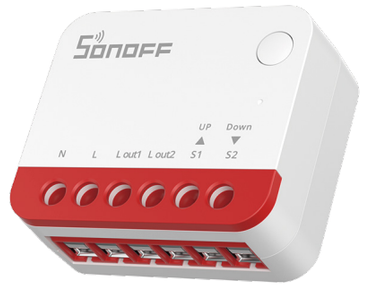

MINI-ZBRBS zigbee

Smart Roller Shutter Switch

Remote Control | Voice Control | Percentage Control

Model:	MINI-ZBRBS
Rating:	100-240V~ 50/60Hz 1A Max
Wireless standard:	Zigbee 3.0
Pollution degree:	2
Rated impulse voltage:	4kV
Automatic action:	10000 Cycles
Control type:	Type 1.B
Diameter of wiring(recommend):	18AWG to 14AWG SOL/STR copper conductor only
Net weight:	25.1g
Dimension:	39.5x33x16.8mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

MINI-D matter

Wi-Fi Smart Switch

Remote Control

Dry Contact Output

Support AC/DC Input

Model:	MINI-D
Rating:	100-240V~ 50/60Hz 0.1A Max OR 12-48V ⎓ 1A Max μ
Max.Load:	24V ⎓ 2A Max Resistive load OR 12/24V ⎓ 8W Ⓜ
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	34.5g
Dimension:	41x43x21.5mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

S-MATE Extreme

eWeLink-Remote Switch Mate

eWeLink-Remote

Model:	S-MATE2
Rating:	3V ⎓
Battery model:	CR2477(3V)
Wireless standard:	2.4G
Net weight:	26.8g
Dimension:	40.3x37.4x18.3mm
Color:	White
Casing material:	ABS
Certification:	CE/FCC/ISED/RoHS

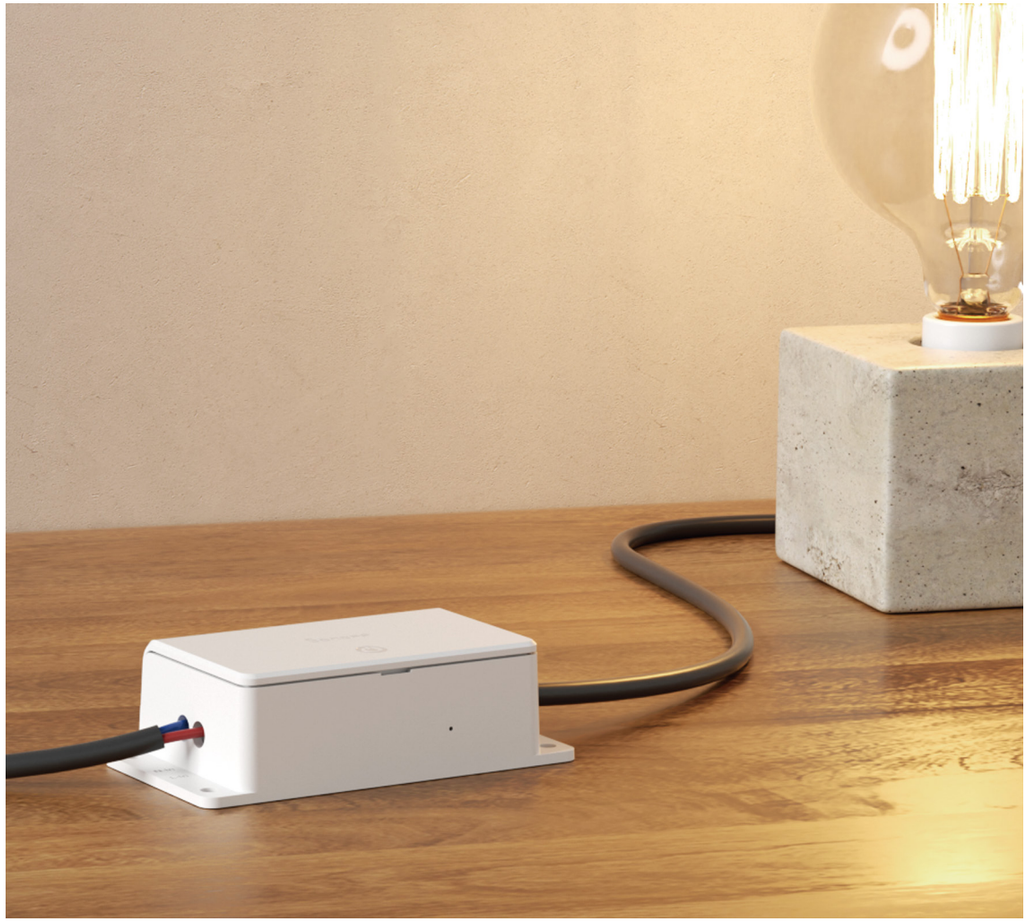

Basic Gen5 matter

Matter Over WiFi Smart Switch

Remote Control | Voice Control | Timer Schedule

Model:	BASIC-1GS
Rating:	100-240V~ 50/60Hz 10A Max
Gang:	1-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	44.8g
Dimension:	80.5x41.5x23.6mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

BASICR4

Wi-Fi Smart Switch

Remote Control | Voice Control | Timer Schedule

Model:	BASICR4
Rating:	100-240V~ 50/60Hz 10A
Gang:	1-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	45.8g
Dimension:	88x39x24mm
Color:	White
Casing material:	PC V0
Certification:	ISED/FCC/RoHS/ETL/CE/SRRC



DUALR3

2-gang Wi-Fi Smart Switch

Motor Mode | Voice Control | Power Monitoring

Model:	DUALR3
Rating:	100-240V~ 50/60Hz
Max.Load:	2400W/240V~10A/Gang 3600W/240V~15A/Total
Motor Load:	10-240W/1A
Gang:	2-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	58g
Dimension:	54x49x24mm
Color:	White
Casing material:	PC V0
Certification:	TUV/CE/FCC/RoHS

DUALR3 Lite

2-gang Wi-Fi Smart Switch

Motor Mode | Voice Control

Model:	DUALR3 Lite
Rating:	100-240V~ 50/60Hz
Max.Load:	2400W/240V~10A/Gang 3600W/240V~15A/Total
Motor Load:	10-240W/1A
Gang:	2-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	58g
Dimension:	54x49x24mm
Color:	White
Casing material:	PC V0
Certification:	TUV/CE/FCC/RoHS

TH Origin/TH Elite

Smart Temperature and Humidity Monitoring Switch

Voice Control | Single/Countdown Timing | Temperature/Humidity Monitoring

Model:	THR316, THR316D, THR320D
Rating:	100-240V~ 50/60Hz
Max.Load:	THR316,THR316D:16A THR320D:20A
Dry Contact Output:	5-30V, 1A Max
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	THR316:100g THR316D,THR320D:120g
Dimension:	THR316:98x54x27.5mm THR316D,THR320D:98x54x31mm
Color:	White
Casing material:	PC V0
Certification:	TUV/CE/WWA/FCC/RoHS/SRRC
Compatible Sensors:	THS01, MS01, WTS01, RL560

* You can connect SONOFF RL560 seneor extension cable to the sensor to monitor the humidity level in an ideal position.

THR316

THR316D/THR320D

POW Origin/POW Elite

Smart Power Meter Switch

Remote Control | Voice Control | Power Monitoring | Single/Countdown Timing

Model:	POWR316, POWR316D, POWR320D
Rating:	100-240V~ 50/60Hz
Max.Load:	POWR316, POWR316D: 16A POWR320D: 20A
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	POWR316: 100g POWR316D, POWR320D: 120g
Dimension:	POWR316: 98x54x27.5mm POWR316D, POWR320D: 98x54x31mm
Color:	White
Casing material:	PC V0
Certification:	TUV/CE/FCC/RoHS/SRRC/WWA/CFH

POWR316

POWR316D/POWR320D

POW Ring

Smart Power Meter Switch

Energy monitoring | Overload protection | Smart timer | History record

Model:	POWCT
Rating:	100-240V~ 50/60Hz 2W
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Antenna interface type:	SMA
Transformer interface type:	RJ9
Transformer current detection range:	0-100A
Net weight:	120g (Accessories not included)
Dimension:	98x54x31mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

POWCT

POWR3

Wi-Fi Smart Switch with Energy Monitoring

Remote Control | Voice Control | Power Monitoring | Overload protection

Model:	POWR3
Rating:	100-240V~ 50/60Hz
Max.Load:	25A
Gang:	1-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	490g
Dimension:	162x122x45.5mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/RoHS

4CHPROR3

4-gang Wi-Fi Smart Switch with RF Control

Remote Control | Voice Control | RF Control | Interlock Mode

Model:	4CHPROR3
Rating:	100-240V~ 50/60Hz （DC: 9-23V）
Max.Load:	10A/Gang, 40A/Total
Gang:	4-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & 433MHz
Net weight:	241g
Dimension:	145x90x34mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/RoHS

*Matching accessories(Refer to the accessory series for details):
RM433R2, RM433R2-BASE, 433 RF Controller

4CHR3

4-gang Wi-Fi Smart Switch

Remote Control | Voice Control

Model:	4CHR3
Rating:	100-240V~ 50/60Hz
Max.Load:	10A/Gang, 16A/Total
Gang:	4-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	228g
Dimension:	145x90x34mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/RoHS

ZBMicro

Zigbee USB Smart Adaptor

Remote Control　Voice Control

Model:	ZBMicro
Rating:	5-22V ⎓ 4.6A MAX
Rated Power:	36W MAX（Use QC 3.0 Adaptor）
Wireless standard:	Zigbee 3.0
Interface type:	USB Type-A
Data transfer:	USB 2.0
Net weight:	17.6g
Dimension:	33x31x26.5mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/ISED/RoHS

iFan04-L/iFan04-H

Wi-Fi Smart Ceiling Fan with Light Controller

Remote Control　Voice Control　RF Control　Fan Speed Adjustment

Model:	iFan04-L, iFan04-H
Input:	100-240V~ 50/60Hz 5A
Output:	100-240V~ 50/60Hz (Light:3A Fan:2A Max)
Light:	iFan04-L(Tungsten lamp: 360W/120V Max LED: 150W/120V Max)
	iFan04-H(Tungsten lamp: 690W/230V Max LED: 300W/230V Max)
Gang:	2-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & 433MHz
Net weight:	125g
Dimension:	116X55X26mm
Color:	White
Casing material:	PC V0
Certification:	CE/FCC/RoHS

*Matching accessories(Refer to the accessory series for details): RM433R2,RM433R2-BASE

SMART PLUGS

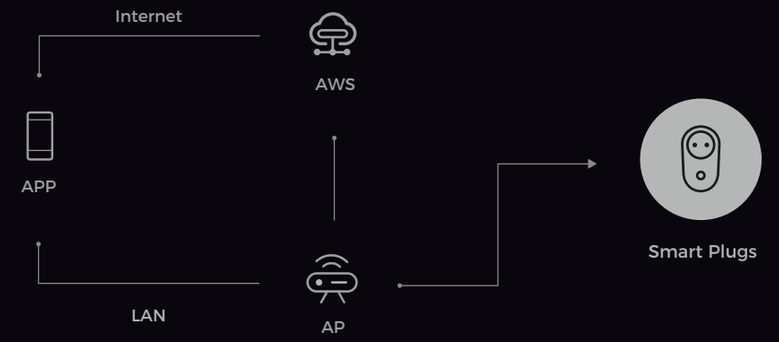

S60TPG/S60ZBTPG

S60TPF/S60ZBTPF

S60TPG/S60TPF

Wi-Fi Smart Plug

Remote Control | Voice Control | Power Monitoring

Model:	S60TPG, S60TPF
Rating:	S60TPG: 250V~50/60Hz MAX 13A μ S60TPF: 250V~50/60Hz MAX 16A μ
Max.Load:	S60TPG: 3250W S60TPF: 4000W
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	S60TPG: 86g S60TPF: 79g
Dimension:	S60TPG: 58x58x42mm S60TPF: 50x50x61.5mm
Color:	White
Casing material:	PC V0
Certification:	CE/RoHS

S60ZBTPG/S60ZBTPF

zigbee

Zigbee Smart Plug

Remote Control | Voice Control | Power Monitoring

Model:	S60ZBTPG, S60ZBTPF
Rating:	S60ZBTPG: 250V~50/60Hz MAX 13A μ S60ZBTPF: 250V~50/60Hz MAX 16A μ
Max.Load:	S60ZBTPG: 3250W S60ZBTPF: 4000W
Wireless standard:	Zigbee3.0
Net weight:	S60ZBTPG: 88.2g S60ZBTPF: 83g
Dimension:	S60ZBTPG: 58x58x42mm S60ZBTPF: 50x50x61.5mm
Color:	White
Casing material:	PC V0
Certification:	CE/RoHS

Type A

Type B

S40

Wi-Fi Smart Plug

Remote Control | Voice Control | Power Monitoring

Model:	S40
Rating:	Type A: 100V~ 50/60Hz Type B: 120V~ 60Hz
Max.Load:	15A
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	Type A: 68g Type B: 74g
Dimension:	76x40x32mm
Color:	White
Casing material:	PC V0
Certification:	Type A: TELEC/PSE/RoHS Type B: ETL/FCC/RoHS

S40 Lite

Wi-Fi Smart Plug

Remote Control | Voice Control | eWeLink-Remote

Model:	S40 Lite
Rating:	Type A: 100V~ 50/60Hz Type B: 120V~ 60Hz
Max.Load:	15A
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	Type A: 68g Type B: 74g
Dimension:	76x40x32mm
Color:	White
Casing material:	PC V0
Certification:	Type A: TELEC/PSE/RoHS Type B: ETL/FCC/RoHS

S31

Wi-Fi Smart Plug with Power Monitoring

Remote Control | Voice Control | Power Monitoring

Model:	S31
Rating:	120V~ 50/60Hz
Max.Load:	15A
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	79g
Dimension:	76x40x32mm
Color:	White
Casing material:	PC V0
Certification:	ETL/FCC/RoHS

S31 Lite

Wi-Fi Smart Plug

Remote Control | Voice Control

Model:	S31 Lite
Rating:	120V~ 50/60Hz
Max.Load:	15A
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	79g
Dimension:	76x40x32mm
Color:	White
Casing material:	PC V0
Certification:	ETL/FCC/RoHS

SMART WALL SWITCHES

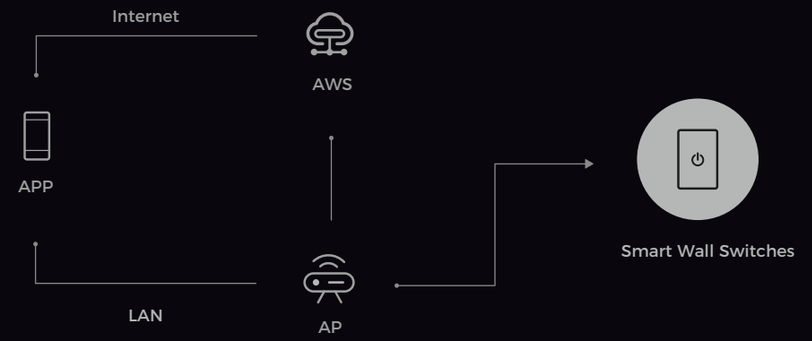

Orb-MW1 matter

Matter over WiFi smart wall switch

Matter Compatibility | Detach Relay Mode | Smart Schedule

Model:	MINIR4M-E
Rating:	100-240V~ 50/60Hz 10A Max Resistive load μ
Wireless standard:	Wi-Fi IEEE 802.11b/g/n 2.4GHz
Diameter of wiring(recommend):	16AWG to 14AWG SOL/STR copper conductor only
Net weight:	84g
Dimension:	86x86x34mm
Color:	White
Casing material:	PC
Certification:	CE/RoHS

Orb-ZBW1 zigbee

Zigbee smart wall switch

Zigbee Repeater | Detach Relay Mode | Smart Schedule

Model:	ZBMINIR2-E
Rating:	100-240V~ 50/60Hz 10A Max Resistive load μ
Wireless standard:	Zigbee 3.0
Diameter of wiring(recommend):	16AWG to 14AWG SOL/STR copper conductor only
Net weight:	83.5g
Dimension:	86x86x34mm
Color:	White
Casing material:	PC
Certification:	CE/RoHS

Orb-ZBW1L zigbee

Zigbee smart wall switch (No neutral required)

Remote Control | No Neutual Wire Required | Smart Schedule

Model:	ZBMINIL2-E
Rating:	100-240V~ 50/60Hz 6A Max Resistive load μ
LED:	150W Max@100V, 300W Max@240V
Max. load:	1440W
Min. load:	3W
Wireless standard:	Zigbee 3.0
Diameter of wiring(recommend):	16AWG to 14AWG SOL/STR copper conductor only
Net weight:	80g
Dimension:	86x86x35.8mm
Color:	White
Casing material:	PC
Certification:	CE/RoHS

Orb-MW2 matter

2-Gang Matter Over WiFi Smart Wall Switch

Remote Control | Voice Control | Timer Schedule

Model:	MINI-2GS-E
Rating:	110-240V~ 50/60Hz 10A/gang, Total 16A MAX Resistive load μ
Wireless standard:	Wi-Fi IEEE 802.11b/g/n 2.4GHz
Diameter of wiring(recommend):	16AWG to 14AWG SOL/STR copper conductor only
Dimension:	86x86x33.7mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

Orb-ZBW2 zigbee

2-Gang Zigbee Smart Wall Switch

Remote Control | Voice Control | Smart Scene

Model:	MINI-ZB2GS-E
Rating:	110-240V~ 50/60Hz 10A/gang, Total 16A MAX Resistive load μ
Wireless standard:	Zigbee IEEE 802.15.4
Diameter of wiring(recommend):	16AWG to 14AWG SOL/STR copper conductor only
Dimension:	86x86x33.7mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

Orb-ZBW2L zigbee

2-Gang Zigbee Smart Wall Switch (No Neutral Required)

Remote Control | Voice Control | Smart Scene

Model:	MINI-ZB2GS-L-E
Rating:	100-240V~ 50/60Hz 10A/gang, Total 12A MAX Resistive load μ
Wireless standard:	Zigbee IEEE 802.15.4
Diameter of wiring(recommend):	16AWG to 14AWG SOL/STR copper conductor only
Dimension:	86x86x33.7mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

Orb-RBS matter

Matter Over WiFi Smart Roller Shutter Wall Switch

Remote Control | Smart Timer/Scene | Percentage Control

Model:	MINI-RBS-E
Rating:	100-240V~ 50/60Hz 1A Max
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Diameter of wiring(recommend):	18AWG to 14AWG SOL/STR copper conductor only
Net weight:	84.7g
Dimension:	86x86x34mm
Color:	White
Casing material:	PC
Certification:	CE/RoHS

Orb-ZBRBS zigbee

Zigbee Smart Roller Shutter Wall Switch

Remote Control | Smart Timer/Scene | Percentage Control

Model:	MINI-ZBRBS-E
Rating:	100-240V~ 50/60Hz 1A Max
Wireless standard:	Zigbee 3.0
Diameter of wiring(recommend):	18AWG to 14AWG SOL/STR copper conductor only
Net weight:	84.1g
Dimension:	86x86x34mm
Color:	White
Casing material:	PC
Certification:	CE/RoHS

Orb-DIM matter

Matter over WiFi Smart Dimmer Wall Switch

Remote Control | Voice Control | Percentage Dimming

Model:	MINI-DIM-E
Rating:	220-240V~ 50Hz 2A Max load μ
Wireless standard:	Wi-Fi IEEE 802.11b/g/n 2.4GHz
Dimension:	86x86x33.7mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

Orb-ZBDIM zigbee

Zigbee Smart Dimmer Wall Switch

Remote Control | Voice Control | Percentage Dimming

Model:	MINI-ZBDIM-E
Rating:	220-240V~ 50Hz 2A Max load μ
Max.Load:	2A Max
Wireless standard:	Zigbee 3.0
Dimension:	86x86x33.7mm
Color:	White
Casing material:	PC
Certification:	CE/FCC/RoHS

TX Ultimate

Smart Touch Wall Switch

Remote Control | Voice Control | Touch Vibration | Light Effects

Model:	T5-1C-86, T5-2C-86, T5-3C-86, T5-4C-86 T5-1C-120, T5-2C-120, T5-3C-120, T5-4C-120
Rating:	100-240V~ 50/60Hz
Max.Load:	1C: 5A 2C: 5A/Gang 3C: 5A/Gang 4C: 4A/Gang
Gang:	1-Gang/2-Gang/3-Gang/4-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	86 Type (1C: 164g 2C: 168.5g 3C: 174g 4C: 181g) 120 Type (1C: 196.6g 2C: 202g 3C: 207.6g 4C: 210g)
Dimension:	86 Type: 86x86x39mm 120 Type: 120x74x39mm
Color:	White
Casing material:	PC+CRS
Certification:	86 Type: CE/SRRC/RoHS 120 Type: CE/FCC/RoHS/ISED

86 Type

120 Type

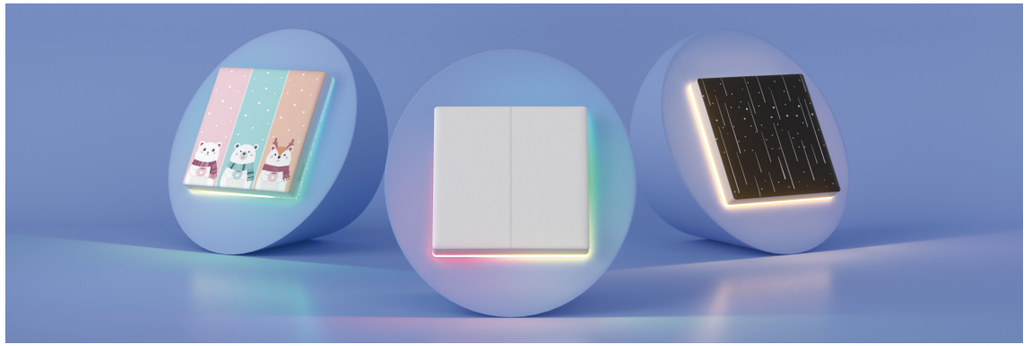

* Star covers and cartoon covers need to be purchased separately.

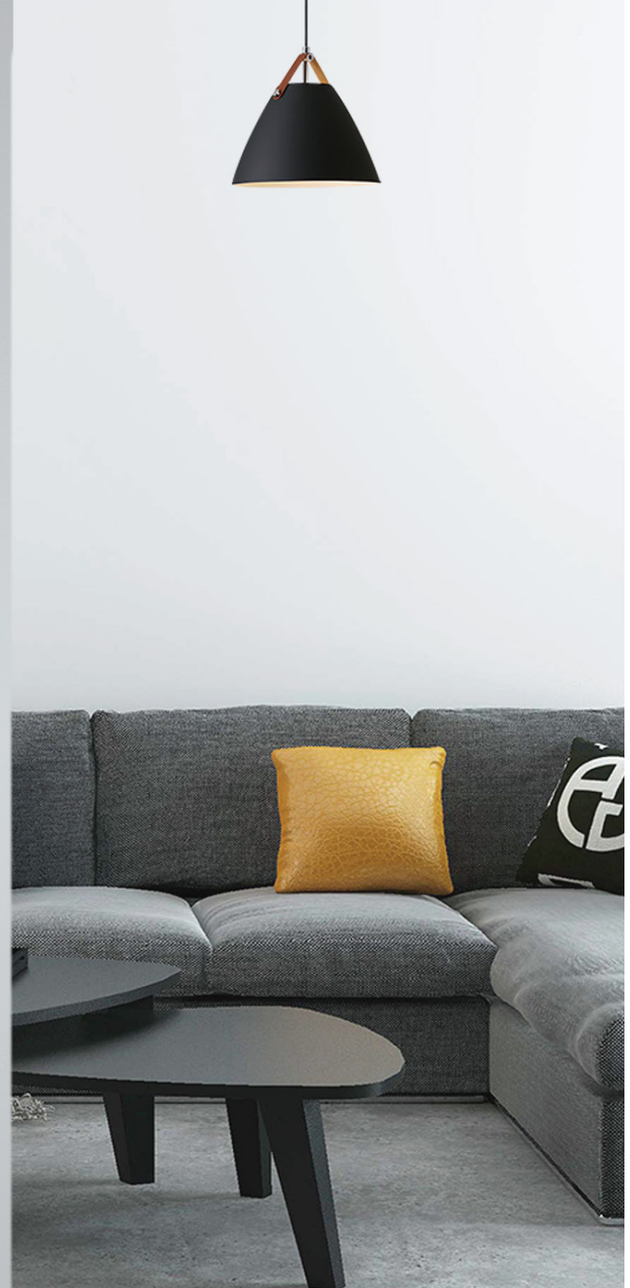

TX Gen2 matter

Smart Touch Wall Switch

Smart Schedule | Night Switch Locator | Detach Relay Mode | Smart Scene

Model:	T6-1C-120M, T6-2C-120M, T6-3C-120M
	100-240V~ 50/60Hz
Rating:	1C: 100-240V~ 50/60Hz 10A Max Resistive load μ
	2C: 100-240V~ 50/60Hz 10A Max/gang, Total 16A Max Resistive load μ
	3C: 100-240V~ 50/60Hz 10A Max/gang, Total 16A Max Resistive load μ
LED:	1C: 150W@100V, 300W@240V
	2C: 150W@100V/gang, 300W@240V/gang, Total 300W@100V, 600W@240V
	3C: 150W@100V/gang, 300W@240V/gang, Total 450W@100V, 900W@240V
Gang:	1-Gang/2-Gang/3-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	1C: 133.3g, 2C: 140.7g, 3C: 149.5g
Dimension:	120x74x37.7mm
Color:	White
Casing material:	PC+Glass
Certification:	CE/FCC/RoHS



T6-1C-120M



T6-2C-120M



T6-3C-120M

TX

Wi-Fi Smart Wall Switch EU Type

Remote Control | RF Control | Touch Control

Rating:	100-240V~ 50/60Hz
Max.Load:	1C: 2A 2C: 2A/Gang 3C: 1A/Gang
Gang:	1-Gang/2-Gang/3-Gang
Support 433MHz RF Control:	T1/T2/T3 Only
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	120~129g
Dimension:	86x86x35mm
Color:	White (T0/T1/T2) Black (T3)
Casing material:	PC+Tempered glass panel
Certification:	FCC/RoHS



TX

Wi-Fi Smart Wall Switch US Type

Remote Control | RF Control | Touch Control

Rating:	100-240V~ 50/60Hz
Max.Load:	2A/Gang
Gang:	1-Gang/2-Gang/3-Gang
Support 433MHz RF Control:	T2/T3 Only
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	147~165g
Dimension:	120x74x38mm
Color:	White (T0/T2) Black (T3)
Casing material:	PC+Tempered glass panel
Certification:	CE/FCC/RoHS

SwitchMan M5 matter

Smart Wall Switch

Remote Control | Voice Control | eWeLink-Remote | Single/Countdown Timing

Model:	M5-1C-80, M5-2C-80, M5-3C-80 M5-1C-86, M5-2C-86, M5-3C-86 M5-1C-120, M5-2C-120, M5-3C-120 M5-1C-80W, M5-2C-80W, M5-3C-80W M5-1C-86W, M5-2C-86W, M5-3C-86W M5-1C-120W, M5-2C-120W, M5-3C-120W
Rating:	100-240V~ 50/60Hz
Max.Load:	1C: 10A 2C: 5A/Gang 3C: 2A/Gang
Gang:	1-Gang/2-Gang/3-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	80 Type (1C: 127g 2C: 134g 3C: 137g) 86 Type (1C: 147g 2C: 154g 3C: 156g) 120 Type (1C: 166g 2C: 174g 3C: 176g)
Dimension:	80 Type: 86x71x41.5mm 86 Type: 86x86x41.5mm 120 Type: 120x74x41.5mm
Color:	Dim Gray, White
Casing material:	PC V0(Dim Gray), PC V0+CRS(White)
Certification:	80 Type: CE/RoHS 86 Type: CE/CQC/RoHS 120 Type: CE/FCC/ISED/RoHS

SwitchMan ZBM5

zigbee

Zigbee Smart Wall Switch

Remote Control

Voice Control

Neutral Wire Optional

Model:	ZBM5-1C-80W, ZBM5-2C-80W, ZBM5-3C-80W ZBM5-1C-86W, ZBM5-2C-86W, ZBM5-3C-86W ZBM5-1C-120W, ZBM5-2C-120W, ZBM5-3C-120W
Rating:	1C: 100-240V~ 50/60Hz 10A Max Resistive load μ 2C: 100-240V~ 50/60Hz 10A/gang, Total 10A Max Resistive load μ 3C: 100-240V~ 50/60Hz 10A/gang, Total 10A Max Resistive load μ
LED load LED:	1C: 400W@240V, 200W@100V 2C: 400W@240V/gang, 200W@100V/gang, Total 400W@240V, 200W@100V 3C: 400W@240V/gang, 200W@100V/gang, Total 400W@240V, 200W@100V
Min. load:	3W (No neutral required input mode)
Gang:	1-Gang/2-Gang/3-Gang
Wireless standard:	Zigbee 3.0
Net weight:	80 Type (1C: 132.8g, 2C: 141.6g, 3C: 150.3g) 86 Type (1C: 157.3g, 2C: 167.6g, 3C:176g) 120 Type (1C: 176g, 2C: 184g 3C:193g)
Dimension:	80 Type: 86x71x41.5mm 86 Type: 87x87x40.2mm 120 Type: 120x74x39.4mm
Color:	White
Casing material:	PC+CRS
Certification:	CE/FCC/RoHS

ZBM5-1C-80W

ZBM5-2C-80W

ZBM5-3C-80W

ZBM5-1C-120W

ZBM5-2C-120W

ZBM5-3C-120W

ZBM5-1C-86W

ZBM5-2C-86W

ZBM5-3C-86W

CENTRAL CONTROL PANEL

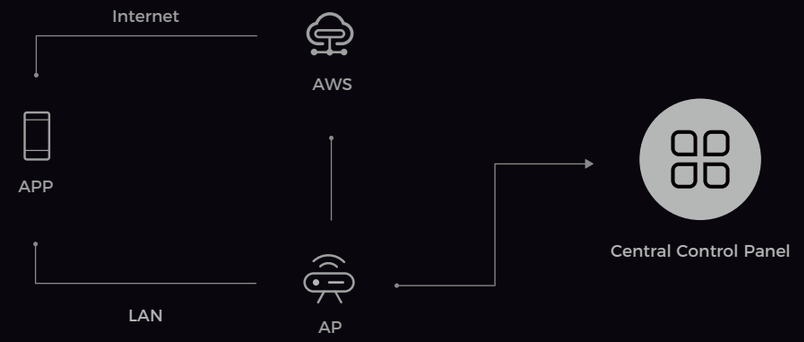

NSPanel86PB/NSPanel86PW

NSPanel120PB/NSPanel120PW

NSPanel

Smart Scene Wall Switch

Remote Control | Voice Control | Thermostat | Touch Control

Model:	NSPanel-EU, NSPanel-EUW, NSPanel-US, NSPanel-USW
Rating:	100-240V~ 50/60Hz
Max.Load:	2A/Gang
LED load:	150W/110V/Gang 300W/220V/Gang
Gang:	2-Gang
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	NSPanel-EU/EUW: 180g NSPanel-US/USW: 209g
Dimension:	NSPanel-EU/EUW: 86x86x41.7mm NSPanel-US/USW: 120x74x41.7mm
Color:	Dim Gray, White
Casing material:	PC V0+CRS+Tempered glass panel
Certification:	NSPanel-EU/EUW: CE/3C/SRRC/RoHS NSPanel-US/USW: CE/FCC/RoHS

NSPanel-EU

NSPanel-EUW

NSPanel-US

NSPanel-USW

NSPanel Pro

zigbee

Smart Home Control Panel

Remote Control | Voice Control | Thermostat | Touch Control

Model:	NSPanel86PB, NSPanel86PW, NSPanel120PB, NSPanel120PW
Rating:	100-240V~ 50/60Hz
Max.Load:	5W MAX; 150mA
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz, Zigbee 3.0
Screen size:	86 Type: 3.95" ,120 Type:4.7" (Capacitive touch panel)
Screen resolution:	86 Type: 480x480 120 Type: 750x1334
Net weight:	86 Type: 180g 120 Type: 214.8g
Dimension:	86 Type: 86x86x39.5mm 120 Type: 122.5x74.5x39.5mm
Color:	Dim Gray, White
Casing material:	PC V0+CRS+Tempered glass panel
Certification:	CE/FCC/RoHS

GATEWAY & SENSORS

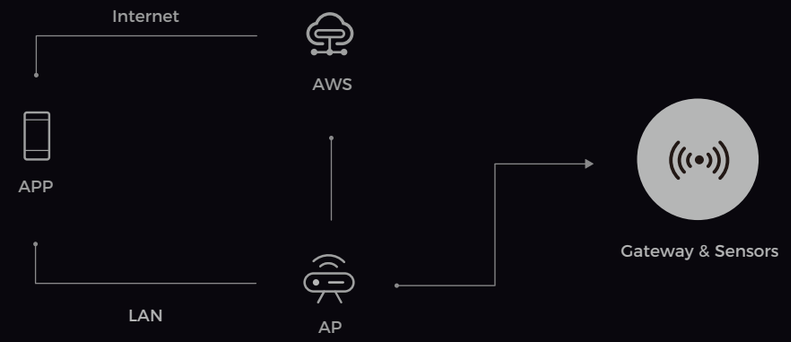

是非成败转头空,青山依旧

Zigbee Wireless Switch

Model:	SNZB-01P
Battery model:	CR2477 (3V)
Wireless standard:	Zigbee 3.0
Net weight:	25.6g
Dimension:	45x45x17.7mm
Casing material:	PC V0
Color:	White
Certification:	CE/FCC/ISED/RoHS

Zigbee Temperature and Humidity Sensor

Model:	SNZB-02P
Battery model:	CR2477 (3V)
Wireless standard:	Zigbee 3.0
Net weight:	25.6g
Dimension:	45x45x17.7mm
Casing material:	PC V0
Color:	White
Certification:	CE/FCC/ISED/RoHS

Zigbee Motion Sensor

Model:	SNZB-03P
Battery model:	CR2477 (3V)
Wireless standard:	Zigbee 3.0
Net weight:	54g
Dimension:	44.2x44.2x59mm
Casing material:	PC+ABS
Color:	White
Certification:	CE/FCC/ISED/RoHS

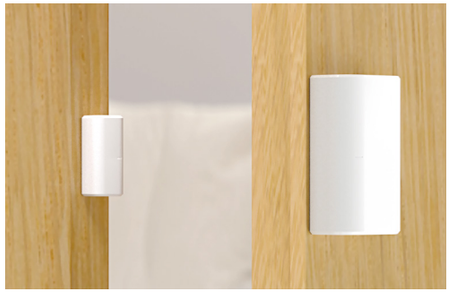

Zigbee Door/Window Sensor

Model:	SNZB-04P
Battery model:	CR2477 (3V)
Wireless standard:	Zigbee 3.0
Net weight:	33g
Dimension:	Transmitter:50.5x32x21.9mm Magnet:27x12x12.4mm
Casing material:	PC+ABS
Color:	White
Certification:	CE/FCC/ISED/RoHS

Zigbee Water Leak Sensor

Model:	SNZB-05P
Battery model:	CR2477 (3V)
Wireless standard:	Zigbee 3.0
IP rating:	IP67
Net weight:	45g
Dimension:	48x48x21.6mm
Casing material:	PC+ABS
Color:	White
Certification:	CE/FCC/ISED/RoHS

Water Leak Detection Cable

Model:	WLDC200
Casing material:	PC+ABS
Length:	2m (6.5ft)
Net weight:	32g

Zigbee Human Presence Sensor

Model:	SNZB-06P
Rating:	5V ⎓ 1A
Interface type:	Type-C
Wireless standard:	Zigbee 3.0
Net weight:	31g
Dimension:	44.2x44.2x59mm
Casing material:	PC+ABS
Color:	White
Certification:	CE/FCC/ISED/RoHS

SNZB-02D

zigbee

Zigbee LCD Smart Temperature Humidity Sensor

High Precision | APP Monitoring | °C / °F Unit Switching | Data Storage & Export

Model:	SNZB-02D
Battery model:	CR2450 (3V)
Wireless standard:	Zigbee 3.0
Temperature tolerance:	±0.2 (℃/℉)
Humidity tolerance:	±2%RH
Net weight:	69.5g
Dimension:	59.5x62.5x18.5mm
Casing material:	PC+LCD
Color:	White
Certification:	CE/FCC/ISED/RoHS

AirGuard TH

zigbee

Zigbee Temperature and Humidity Sensor

Model:	SNZB-02DR2
Input:	3.0V ⎓ (2x1.5V Batteries)
Battery model:	LR03 AAA
Wireless standard:	Zigbee: IEEE 802.15.4
Net weight:	98g
Dimension:	95X70X18.2mm
Casing material:	PC+ABS
Color:	White
Certification:	CE/FCC/RoHS

SNZB-02WD

zigbee

Zigbee LCD Smart Thermometer

IP65 Protection Rating | APP Monitoring | Reading Switch | Data Store & Export

Model:	SNZB-02WD
Input:	3V ⎓
Battery model:	CR2477
Working temperature:	-20°C~60°C/-4°F~140°F
Working humidity:	0~100%RH
Temperature tolerance:	±0.2°C/±0.36°F
Humidity tolerance:	±2%RH
Wireless standard:	Zigbee 3.0
Net weight:	65.6g
LCD dimension:	2.2"
Dimension:	62.8x58.5x21.8mm
Casing material:	PC+ABS
Color:	White
IP rating:	IP65
Certification:	CE/FCC/ISED/RoHS

SNZB-02LD

zigbee

Zigbee LCD Smart Thermometer (Probe Version)

IP65 Protection Rating | APP Monitoring | Reading Switch | Probe Temperature Measurement

Model:	SNZB-02LD
Input:	3V ⎓
Battery model:	CR2477
Host working temperature:	-10°C~60°C/14°F~140°F
Host working humidity:	0~100%RH
Temperature tolerance:	±0.5°C/±0.9°F
Cable length:	1.5m
Wireless standard:	Zigbee 3.0
Net weight:	86.2g（Includes cables）
LCD dimension:	2.2"
Dimension:	62.8x58.5x21.8mm
Casing material:	PC+ABS
Color:	White
IP rating:	IP65
Certification:	CE/FCC/ISED/RoHS

iHost

zigbee

Smart Home Hub

Local, Fast & Reliable automations

Device data stays local & private

Compatible with many device types

Open API and Add-on integration

Model:	AIBridge-26
Rating:	5V ⎓ 2A
Power interface:	Type-C
Ethernet interface:	RJ45
Storage expansion method:	TF card (TF card supports up to 256GB)
CPU:	RV1126 Quad-Core 1.5GHz
NPU:	2.0Tops INT8/INT16
RAM:	DDR4 4GB
Storage:	eMMC 8GB
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & Zigbee 3.0
Net weight:	208g
Dimension:	120X135.5X41mm
Casing material:	ABS
Color:	White
Certification:	CE/FCC/ISED/RoHS

ZBBridge Ultra

zigbee

Zigbee Bridge

Matter Bridge

Voice Control

Smart Home Security

Push Notification

Model:	ZBBridge-U
Rating:	5V ⎓ 1A
Power supply interface type:	Type-C
Network interface type:	RJ45 (10/100Mbps)
CPU:	Dual-Core 1.5GHz
RAM:	DDR4 1GB
Storage:	eMMC 8GB
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & Zigbee 3.0
Net weight:	92.5g
Dimension:	82x82x28mm
Casing material:	PC+ABS
Color:	White
Certification:	CE/FCC/ISED/RoHS

Dongle Max

Zigbee/Thread PoE Dongle

High-Performance | PoE Power Supply | Dual Antenna Gain | Web Console | AP Hotspot | Webhooks

Model:	Dongle-M
Input:	5V ⎓ 1A for Type C or 48V ⎓ 0.25A for PoE port
Wireless connections:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & Zigbee 3.0
Network interface type:	RJ45
Net weight:	102g
Dimension:	169x32.5x22mm
Casing material:	Aluminum Alloy, PC+ABS
Color:	Dim gray
Certification:	CE/FCC/RoHS

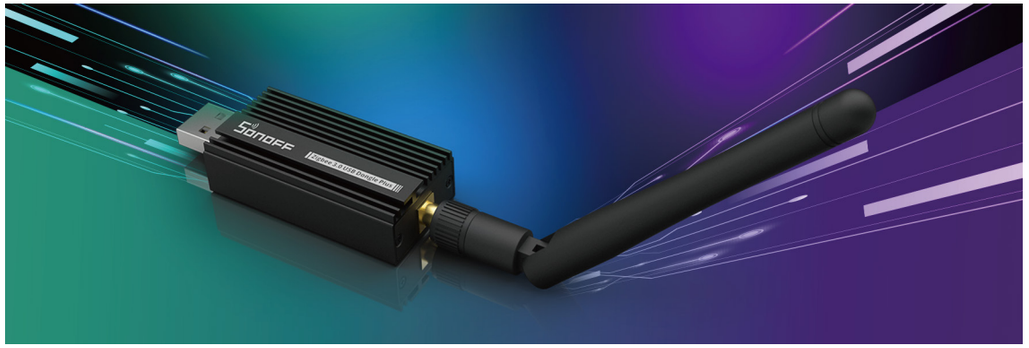

Zigbee 3.0 USB Dongle Plus

Model:	ZBDongle-E
Rating:	5V ⎓ 100mA Max
Wireless standard:	Zigbee 3.0
Net weight:	30g
Dimension:	75x25.5x13.5mm
Color:	Black
Casing material:	Aluminum alloy
Certification:	CE/FCC/RoHS

EFR32MG21

Matching accessories (Refer to the accessory series for details)

USB Male to female extension cable

Dongle Plus MG24

Zigbee/Thread USB Dongle

Model:	Dongle-PMG24
Input:	5V ⎓ 500mA
Wireless connections:	Zigbee: IEEE 802.15.4
Net weight:	19.1g
Dimension:	214x18x10.5mm
Casing material:	Aluminum Alloy, PC+ABS
Color:	Dim gray
Certification:	CE/FCC/RoHS

Dongle Lite MG21

Zigbee/Thread USB Dongle

Model:	Dongle-LMG21
Input:	5V ⎓ 500mA
Wireless connections:	Zigbee: IEEE 802.15.4
Net weight:	9g
Dimension:	133x18.6x10.1mm
Casing material:	PC+ABS
Antenna material:	TPEE
Color:	Black
Certification:	CE/FCC/RoHS

Zigbee Bridge Pro

Model:	ZB Bridge-P
Rating:	5V ⎓ 1A
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz & Zigbee 3.0
Net weight:	39.5g
Dimension:	62x62x20mm
Casing material:	PC V0
Color:	White
Certification:	CE/FCC/RoHS

433MHz RF Bridge

Model:	RF BridgeR2
Rating:	5V ⎓ 1A
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n & 433MHz
Net weight:	37.5g
Dimension:	62x62x20mm
Casing material:	PC V0
Color:	White
Certification:	CE/FCC/RoHS

Wi-Fi Wireless Door/Window Sensor

Model:	DW2 Wi-Fi
Battery model :	AAA(1.5)x2
Wireless standard:	Wi-Fi IEEE 802.11 b 2.4GHz
Net weight:	28g
Dimension:	Transmitter: 70x31x19mm Magnet: 42x14x16mm
Casing material:	PC V0
Color:	White
Certification:	CE/FCC/RoHS

BBQ Meat Thermometer

Temperature Detection

APP Monitoring

°C/°F Unit Switching

Timer Reminder

Model:	BMT01
Input:	3V ⎓ 0.1A (2*1.5V Batteries)
Battery model:	AAA (1.5V)
Working temperature (BBQ meat thermometer):	-10°C~55°C/14~131°F
Working temperature (BBQ meat thermometer probe sensor):	0~300°C/32~572°F
Net weight:	100g (Not including batteries and other accessories.)
Dimension:	104.6x71.4x19.2mm
Casing material:	PC
Color:	Black
Certification:	CE/FCC/ISED/RoHS

*The package includes two probes. Additional probes can be purchased to expand to four.

BBQ Meat Thermometer Probe Sensor

Model:	MPS01
Casing material:	SUS304
Probe length:	15cm
Total length:	1.5m
Net weight:	0~300°C/32~572°F
Working temperature:	21.5g/pcs
Compatible product:	BMT01

SECURITY CAMERAS

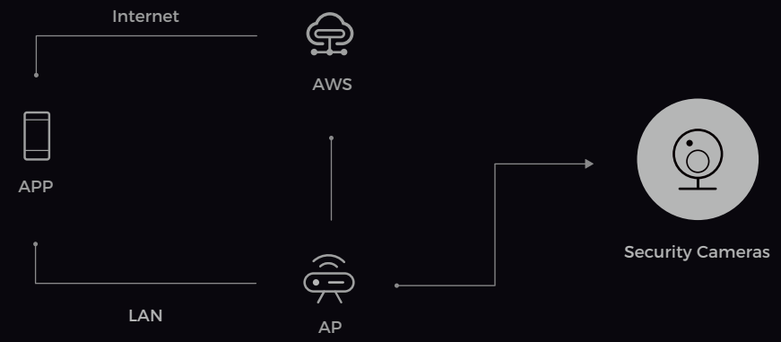

CAM Pan-Tilt 2

Wi-Fi Smart Security Camera

Two-way Audio | Smart Night Vision | Motion detection | 360° Panoramic View | Physical Privacy Mode

Model:	CAM-PT2
Rating:	5V ⎓ 2A
Interface type:	Type-C
Resolution:	1080p
Lens Aperture:	F2.0
Rotation angle:	Horizontal 340°/Vertical 180°
Video compression standard:	H.264
Camera lens angle:	>100°
Storage methods:	Cloud storage and TF card (Max.128GB for TF card)
Wireless connection:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	193g (Accessories not included)
Dimension:	∅74x119mm
Casing material:	ABS
Color:	Black & White
Certification:	CE/FCC/RoHS

CAM Slim Gen2

Wi-Fi Smart Security Camera

Two-way Audio | IR Night Vision | 1080P Live View | Motion detection | Support cloud storage

Model:	CAM-S2
Rating:	5V ⎓ 1A
Interface type:	Type-C
Resolution:	1920x1080
Lens Aperture:	F2.0
Storage location:	Cloud storage and TF card (Max.128GB for TF card)
Wireless standard:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	65g (Accessories not included)
Dimension:	48x46x86.5mm
Casing material:	PC+ABS
Color:	White
Certification:	CE/FCC/RoHS

CAM Outdoor

Outdoor Smart Security Camera

Two-way Audio | Full-color Night Vision | AI Human Detection | 2K HD Clarity | IP65 Waterproof

Model:	CAM-B1P
Rating:	5V ⎓ 2A
Interface type:	USB-A
Resolution:	2K
Lens Aperture:	F1.6
Rotation angle:	Horizontal 180°
Video compression standard:	H.264
Camera lens angle:	108°
Storage methods:	Cloud storage and TF card (Max.128GB for TF card)
Wireless connection:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Net weight:	282.7g (Accessories not included)
Dimension:	61mm×91mm×161mm
Casing material:	ABS+PC
Color:	White
Certification:	CE/FCC/RoHS

HOME APPLIANCES

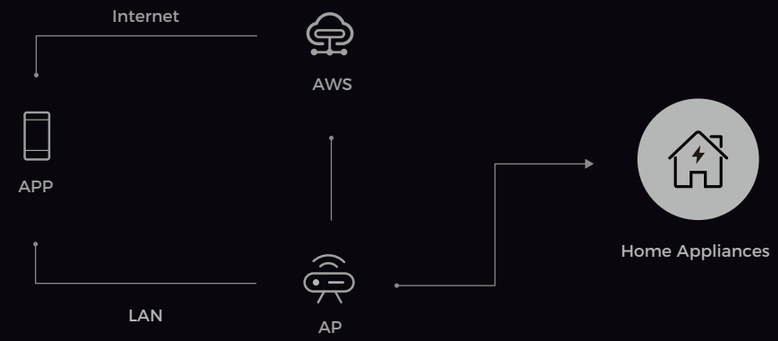

Zigbee Thermostatic Radiator Valve

Remote Control | Timing Schedule | Precise Temperature Control | Child Safety Lock

Model:	TRVZB
Rating:	4.5V ⎓ (3x1.5V AA Batteries)
Battery model:	1.5V LR6 Alkaline AA Battery
Threaded connection:	M30x1.5mm
Temperature setting range:	4°C-35°C
Wireless standard:	Zigbee 3.0
Net weight:	157g
Dimension:	59.4x59.4x95mm
Casing material:	PC
Color:	White
Certification:	CE/RoHS

Zigbee Smart Water Valve

APP control | Timed watering | Cyclic irrigation | Water consumption statistics

Model:	SWV-NH, SWV-BSP
Rating:	6V ⎓ (4x1.5V AA Batteries)
Communication distance:	130M (open space)
Waterproof :	IP55
Working Pressure:	0.06~0.8 MPa
Watering Temperatur:	5~40°C
Wireless standard:	Zigbee 3.0
Net weight:	278g
Dimension:	152x100x46mm
Casing material:	PC+ABS
Color:	Black
Certification:	CE/FCC/ISED

ACCESSORIES

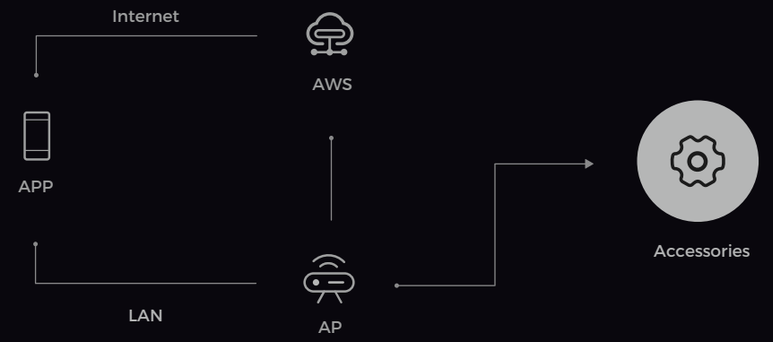

Waterproof Temperature Sensor

Model:	WTS01
Compatible Products:	TH Origin, TH Elite
Interface/Connector types:	RJ9 4P4C
Temp. Measuring:	-10°C ~+85°C
Working Temperature:	-40°C-+115°C
Net weight:	36.3g
Cable length:	1.5M
Casing material:	PVC
Color:	Black

Temp. & Hum. Sensor

Model:	THS01
Compatible Products:	TH Origin, TH Elite
Temp. Measuring:	-40°C~+85°C
Working humidity:	0~100RH%
Net weight:	21.7g
Cable length:	0.5M
Casing material:	ABS V0
Color:	Black

Sensor Extension Cable

Model:	RL560
Compatible Products:	TH Origin, TH Elite
Interface/Connector types:	RJ9 4P4C
Net weight:	75.0g
Cable length:	5M
Casing material:	PVC V0
Color:	Black

Soil Moisture Sensor

Model:	MS01
Compatible Products:	TH Origin, TH Elite
Working Temperature:	0°C~60°C
Working humidity:	0~100RH%
Net weight:	28.9g
Cable length:	0.5M
Casing material:	PC V0
Color:	Dim Gray

Roller Shutter Wall Switch Enclosure

Model: ERBS
Product series: Fusion series
Dimension: 86x86x21mm
Casing material: PC
Color: White

Wall Switch Enclosure

Model: E1GS
Product series: Fusion series
Dimension: 86x86x21mm
Casing material: PC
Color: White

Wall Switch Enclosure

Model: E1GSL
Product series: Fusion series
Dimension: 86x86x22.6mm
Casing material: PC
Color: White

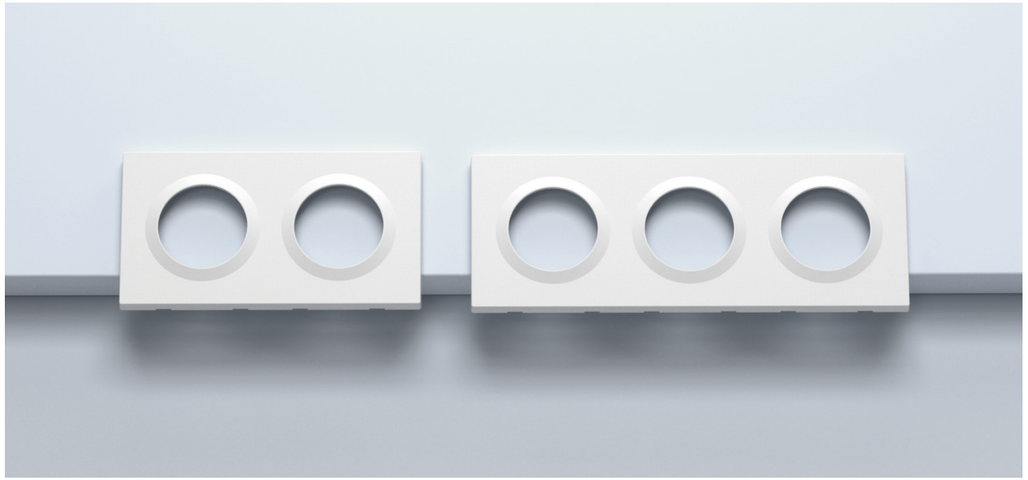

Wall Switch Frame

Model: EF2G
Product series: Fusion series
Dimension: 157x86x10mm
Casing material: PC
Color: White

Wall Switch Frame

Model: EF3G
Product series: Fusion series
Dimension: 228x86x10mm
Casing material: PC
Color: White

R5

R5W

SwitchMan R5

SONOFF SwitchMan Scene Controller

eWeLink-Remote

Model:	R5, R5W
Battery model:	CR2032 (3V)X2
Control distance:	Max. 90M (Open space)
Numbers of button:	6
Net weight:	91g
Dimension:	86x86x13.5mm
Casing material:	PC V0+Tempered glass panel
Color:	Dim Gray, White

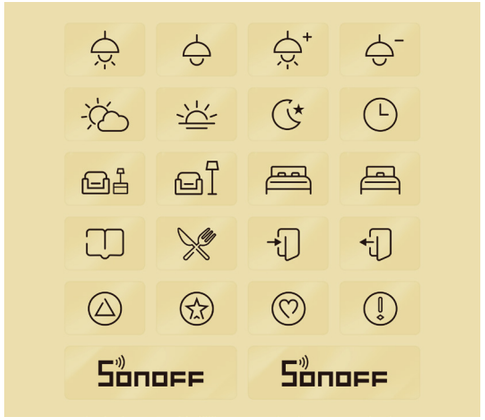

Button sticker

Switch Frame

SONOFF Switch Frame 2-Gang/3-Gang/4-Gang

Net weight:	2-Gang:44.4g
	3-Gang:56.6g
	4-Gang:72.2g
Dimension:	2-Gang:157x86x14.8mm
	3-Gang:228x86x14.8mm
	4-Gang:299x86x14.8mm
Casing material:	PC V0
Color:	Dim, Gray White

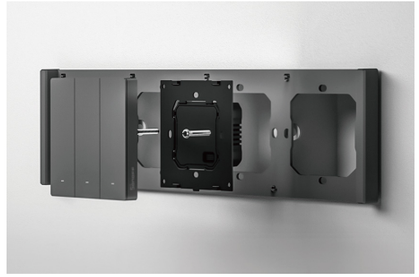

*The Switch Frame is optional to install M5-80 only and the mounting box.

DIN Rail Tray

Model:	DR
Compatible Products:	BASICR2, RF, BASICR3, RFR3, DUALR2, POWR2, TH10, TH16
Net weight:	21.4g
Dimension:	122x54x14mm
Casing material:	ABS V0

USB Male to female extension cable

Net weight:	59.3g

Enclosure Stand

Model:	StandB, StandW
Net weight:	108.5g
Dimension:	121x88.5x67.5mm
Casing material:	PC V0
Color:	Dim Gray, White



IP66 Waterproof Case

Model:	Waterproof Case-IP66
Compatible Products:	BASICR2, RF, BASICR3, RFR3, DUALR2, POWR2, TH10, TH16
Net weight:	107.8g
Dimension:	135x72x52mm
Casing material:	ABS V0

NFC-Tag

Net weight:	8.2g
NFC Card Size:	85.5x54mm
Tag Size:	18x18mm

Waterproof box

Model:	Waterproof box R2
Compatible Products:	TH Elite, TH Origin, POW Elite, POW Origin, BASIC Series, DUALR2, POWR2, NSPanel Pro, M5 Series, TX Series, NSPanel Series
Net weight:	204.3g
Dimension:	152.5x100x48mm
Casing material:	PC V0
Color:	Transparent tawny

5V USB Power Adapter

Type:	Type-E/F
Input:	100-240V~ 50/60Hz 0.35A Max
Output:	5V ⎓ 2A 10.0W
Net weight:	43.1g
Dimension:	40.5x34.5x21mm
Casing material:	PC V0

5V USB Power Adapter

Type:	Type-I
Input:	100-240V~ 50/60Hz 0.3A Max
Output:	5V ⎓ 2A 10.0W
Net weight:	40.0g
Dimension:	47x35.5x24mm
Casing material:	PC V0

5V USB Power Adapter

Type:	Type-A/B
Input:	100-240V~ 50/60Hz 0.35A Max
Output:	5V ⎓ 2A 10.0W
Net weight:	36.5g
Dimension:	40.5x34.5x21mm
Casing material:	PC V0

5V USB Power Adapter

Type:	Type-G
Input:	100-240V~ 50/60Hz 0.3A Max
Output:	5V ⎓ 2A 10.0W
Net weight:	43.6g
Dimension:	48x44x22.5mm
Casing material:	PC V0

8-key 433MHz Remote Controller

Model:	RM433R2
Compatible Products:	RF, RFR3, 4CHPROR3, iFan03, SlampherR2, TX Series*(T2/T3), RF Bridge D1*(On the way...)
Battery model:	CR2450 (3V) X2
Wireless standard:	433MHz
Net weight:	47.0g
Dimension:	87x45x12mm
Casing material:	PC V0

433MHz Remote Controller Base

Model:	RM433R2-BASE
Compatible Products:	RM433R2
Temp.Measuring:	3M Tapes/Screws
Net weight:	52.2g
Dimension:	86x86x15mm
Casing material:	PC V0

4-key 433MHz Remote Controller

Model:	433 RF Controller
Battery model:	CR2032
Wireless standard:	433MHz
Net weight:	24.8g
Dimension:	55x30x14mm
Casing material:	ABS V0

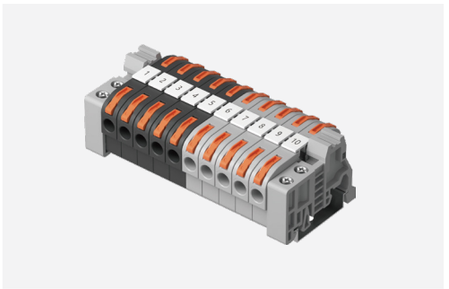

Din Rail Wire Connectors

Model:	211
Rated voltage:	250V
Rated current:	32A
Contact material:	Red copper
Insulation material:	PA
Package size:	190x132x23mm

Wire Splicing Connectors

Model:	D1-1
Rated voltage:	250V
Rated current:	32A
Contact material:	Red copper
Insulation material:	PC
Package size:	165x87x17mm

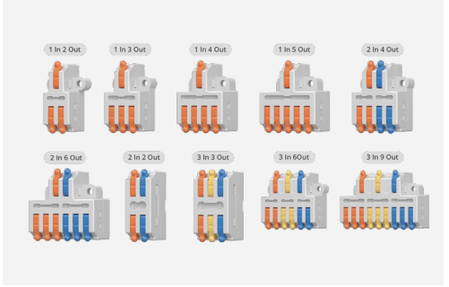

Quick Wire Connectors

Model:	D1-2
Rated voltage:	250V
Rated current:	32A
Contact material:	Red copper
Insulation material:	PC
Package size:	210x112x30mm

SONOFF ECOSYSTEM

Innovative Product

DIY SMART SWITCHES

CENTRAL CONTROL PANEL

SMART WALL SWITCHES

GATEWAY & SENSORS

SECURITY CAMERAS

SMART PLUGS

HOME APPLIANCES

ACCESSORIES

Software

eWeLink APP
Andriod/iOS

eWeLink Web

eWeLink Cast



In-Vehicle
Infotainment

Wireless Communication

Wi Fi · zigbee · Bluetooth · matter · RF433MHz

Cloud Solution

Global Cloud · Open API · Developer SDK · GDPR.EU

SaaS · PaaS · Private Deployment

LAN Solution

Security Management · Camera Viewer

Local Scene · Add-on · Open API

Third-Party Application

works with alexa · works with Google Home · works with SmartThings · works with IFTTT

works with Alice · Works with Apple Home · works with AliGenie · works with iFLYOS

works with mijia · works with HUAWEI HiLink · SBER · Yasmina

Open-Source Compatible Application

Home Assistant · HomeSeer · OpenHAB · ioBroker · Zigbee2MQTT · Domoticz · Jeedom

Third-Party Integrated Products

works with YEELIGHT 易来 · PHILIPS connect to hue Philips Hue · works with Midea Meiju